

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F





E

D

C

B

A

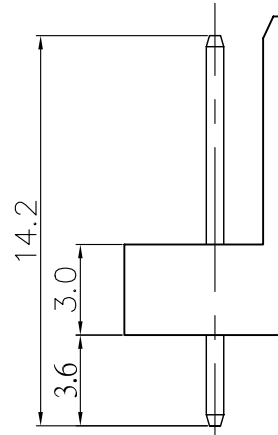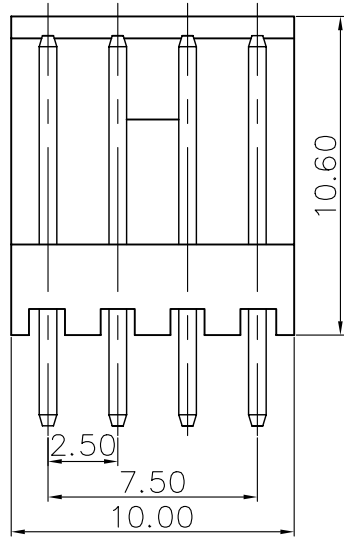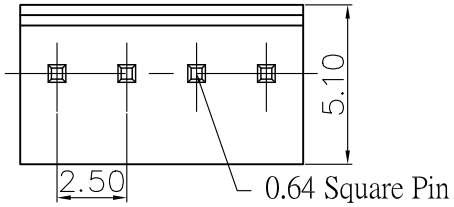


SPECIFICATIONS

Electrical

Current Rating: 2A AC, DC
 Voltage Rating: 100V AC/ max.
 Operating Temp.: -25°C ~ +85°C
 Insulation Resistance: 1000MΩ/ min.
 Withstand Voltage: 800V AC/ min.
 Contact Resistance: 20MΩ/ max.

Material

Terminal Material: Tin/ Gold Plated
 Material: Nylon 66, UL94V-0

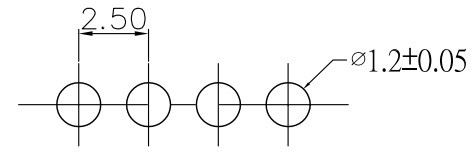

RECOMMENDED P.C. BOARD HOLE DIMM.

PART NO. EI-D-04		APPROVED BY CY		TOLERANCES ARE .X .XX .XXX AWG	DESCRIP TION:			
DWG NO. EI-D-04		DRAWING BY			AREA	REVISIONS	HK	DATE
FILE NO.		PROJECTION						
UNIT / mm	SCALE 1:1							