




2~3



4~6

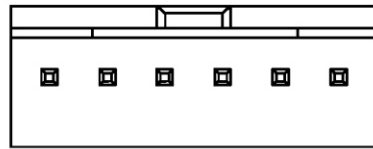

7~15


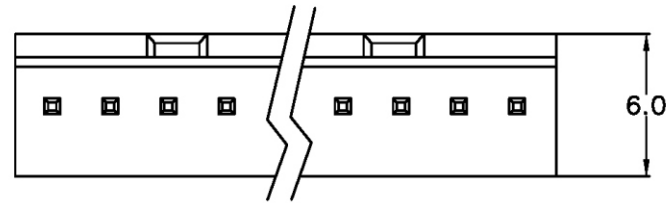


Features:

- 2 ~ 15 circuits available
- Material: UL 94V-0 nylon 66
- Tin-plated brass pin
- .025"(0.64mm) square pin
- Standard color: Orange
- Recommended P.C.B. thickness: .063"(1.6mm)

Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 20mΩ Max.
- Dielectric withstanding voltage: 800V AC/minute
- Ambient temperature range: -25°C ~ 85°C

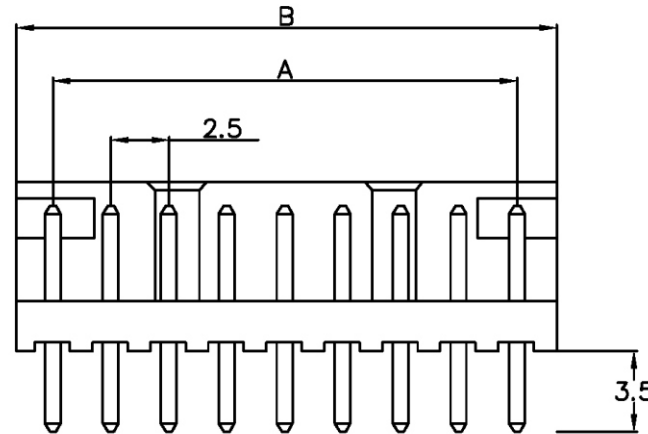

ILG-D-xx-LF

LEADFREE

RoHS Compliant

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	2.50	5.50	6	12.50	15.50	10	22.50	25.50	14	32.50	35.50
3	5.00	8.00	7	15.00	18.00	11	25.00	28.00	15	35.00	38.00
4	7.50	10.50	8	17.50	20.50	12	27.50	30.50			
5	10.00	13.00	9	20.00	23.00	13	30.00	33.00			

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

PART NO. ILG-D-xx

DWG NO. ILG-D-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE