

## Features:

- 2 ~ 15 circuits available
- Material: UL 94V-0 nylon 66
- Standard color: Orange
- Recommended P.C.B. thickness: .063"(1.6mm)


## Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Insulation resistance: 1000M $\Omega$  Min.
- Dielectric withstanding voltage: 800V AC/minute
- Ambient temperature range: -25°C ~ 85°C  
(including temperature rise)




2, 3



4 ~ 6



7 ~ 15

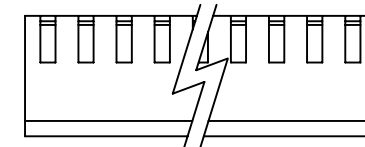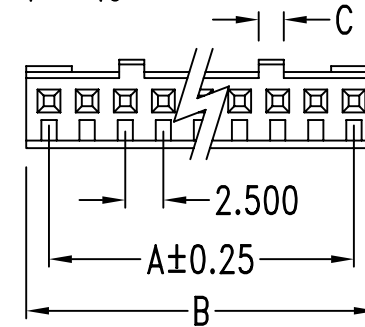

## Dimensional Information ( mm )

Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C
2	2.5	5.5	1.35	7	15.0	18.0	1.65	12	27.5	30.5	1.65
3	5.0	8.0	1.90	8	17.5	20.5	1.65	13	30.0	33.0	1.65
4	7.5	10.5	2.35	9	20.0	23.0	1.65	14	32.5	35.5	1.65
5	10.0	13.0	2.90	10	22.5	25.5	1.65	15	35.0	38.0	1.65
6	12.5	15.5	3.35	11	25.0	28.0	1.65				

**ILG-H-xx-LF**  
LEADFREE  
**RoHS Compliant**

PART NO. **ILG-H-xx**

DWG NO. **ILG-H-xx**

CHECKED BY CY

TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION: .098"(2.5mm) Receptacle Housing

FILE NO.

DRAWING BY

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE

**All Connectors**

www.allconnectors.eu | info@allconnectors.eu  
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25