

SPECIFICATION

CURRENT RATING: 3A AC,DC

VOLTAGE RATING: 250V AC,DC

TEMPERATURE RANGE: -25°C TO $+85^{\circ}\text{C}$

(INCLUDING TEMPERATURE RISE)

CONTACT RESISTANCE: INITIAL VALUE/10M OHM MAX.

AFTER ENVIRONMENTAL TESTING/20M OHM MAX.


INSULATION RESISTANCE: 1,000M OHM MIN.

WITHSTANDING VOLTAGE: 1,000V AC/MINUTE

CONTACT: PHOSPHOR BRONZE, TIN-PLATED

POST: COPPER-UNDERCOATED, TIN/LEAD PLATED

APPLICABLE WIRE: AWG #28 TO #22

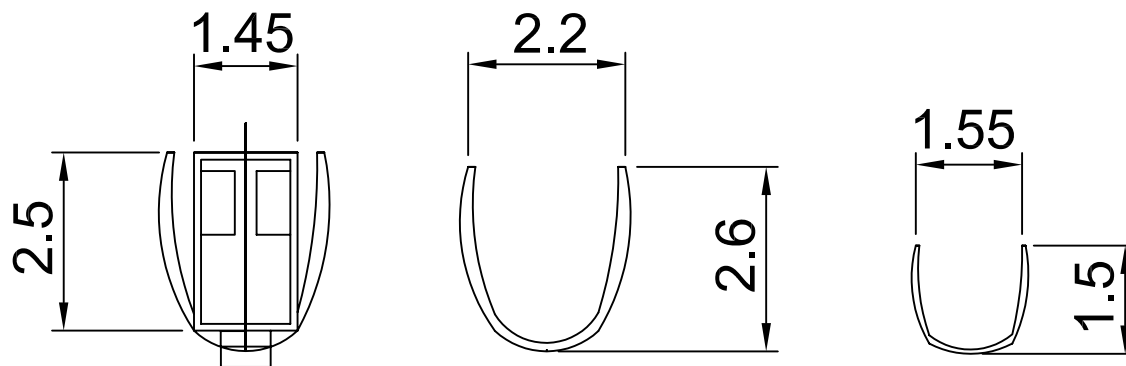

PART NO. RM-T-22

DWG NO. RM-T-22

APPROVED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

X.
XX.
XXX.
AWG

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25