

P.C.B. Layout

Specifications:

Current rating: 3.0A DC Max

Voltage rating: 250V DC Max

Contact resistance: 20m ohm Max

Insulation resistance: 1000M ohm Min

Withstanding voltage: 600V AC/minute

Operating temperature: -40°C ~ +105°C

Materials and Finish

Insulator: High Temp. Plastic (Nylon 66 UL94V-0)

Contact material: Copper Alloy

Plating: Tin Plated, Gold Plated, Selective Gold Plated

RoHS Compliant

All Connectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

X ±
.X ±
.XX ±
.XXX ±
ANG ±

PROJECTION



ORDER INFORMATION

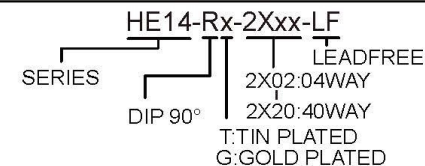

DESCRIPTION: 2.54mm Wire to Board Wafer Double Row