

Connector

Wire To Board Connectors


KLS1-TE-2.54 (2.54mm Pitch Wire To Board Connector)

Electrical Characteristics:




Current Rating: 3A
 Voltage Rating: 250V AC DC
 Insulator Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Withstanding Voltage: AC 1000V for 1 Minute
 Operating Temperature: -25°C~+85°C

Material:


Insulator: P.B.T. UL94V-0
 Contacts: Brass / Tin Plated

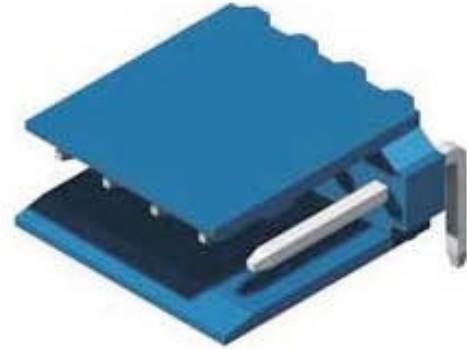

Right Type



No. of Contacts	Dimensions	
	A	B
2	5.08	2.54
3	7.62	5.08
4	10.16	7.62
5	12.70	10.16
6	15.24	12.70
7	17.78	15.24
8	20.32	17.78
10	25.40	22.86
12	30.48	27.94
13	33.02	30.48
15	38.10	35.56
17	43.18	40.64
18	45.72	43.18
20	50.80	48.26

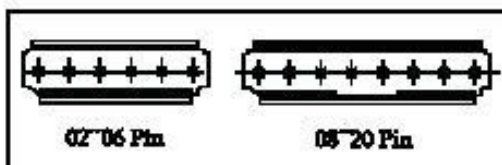

ORDER INFORMATION

Product NO.: KLS1-TE-2.54-1*02-R

Pos. NO. _____ Type: H=Housing T=Terminal
 Pitch 2.54mm _____ S=Straight Type R=Right Type
 Pins: 1 Single layer 2 Double Layer _____ Pin Number: 2~20Pin