

Connector

Wire To Board Connectors

KLS1-TE-2.54 (2.54mm Pitch Wire To Board Connector)

Electrical Characteristics:



Current Rating: 3A
Voltage Rating: 250V AC/DC
Insulator Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Withstanding Voltage: AC 1000V for 1 Minute
Operating Temperature: -25°C~+85°C

Material:


Insulator: P.B.T UL94V-0
Contacts: Brass / Tin Plated



Straight Type

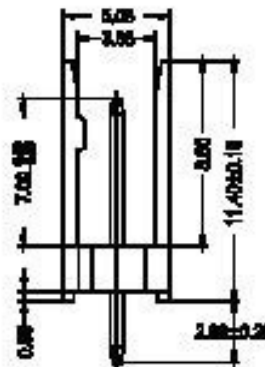

No. of Contacts	Dimensions	
	A	B
2	6.08	2.54
3	7.62	6.08
4	10.16	7.62
5	12.70	10.16
6	15.24	12.70
7	17.78	15.24
8	20.32	17.78
10	25.40	22.88
12	30.48	27.94
18	33.02	30.48
15	38.10	35.56
17	43.18	40.64
18	45.72	43.18
20	50.80	48.26

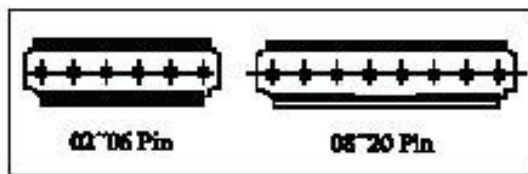

ORDER INFORMATION

Product NO.: **KLS1-TE-2.54-1+02-S**

Pos. NO. _____ Type: H- Housing T- Terminal
Pitch 2.54mm _____ S- Straight Type R- Right Type
Pins: 1-Single layer 2-Double layer _____ Pin Number: 2 - 20Pin