

Connector

Wire To Board Connectors

KLS1-TE-2.54 (2.54mm Pitch Wire To Board Connector)

Electrical Characteristics:


Current Rating: 3A
Voltage Rating: 250V AC DC
Insulator Resistance: 1000M Ω Min.
Contact Resistance: 20m Ω Max.
Withstanding Voltage: AC 1000V for 1 Minute
Operating Temperature: -25°C~+85°C

Material:

Insulator: P.B.T. UL94V-0
Contacts: Brass / Tin Plated



Housing

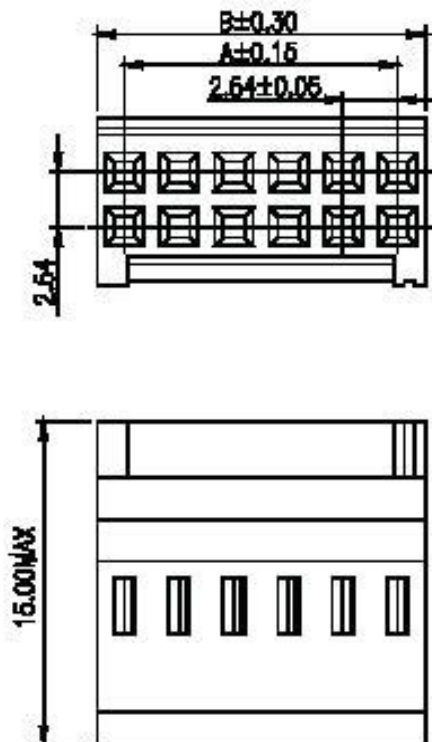

No. of Contacts	Dimension	
	A	B
2x2	2.54	5.08
2x3	5.08	7.62
2x4	7.62	10.16
2x5	10.16	12.70
2x6	12.70	15.24
2x7	15.24	17.78
2x8	17.78	20.32
2x9	20.32	22.86
2x10	22.86	25.40
2x11	25.40	27.94
2x12	27.94	30.48
2x13	30.48	33.02
2x14	33.02	35.56
2x15	35.56	38.10
2x16	38.10	40.64
2x17	40.64	43.18
2x18	43.18	45.72
2x19	45.72	48.26
2x20	48.26	50.80

ORDER INFORMATION

Product NO.: KLS1-TE-2.54-2+02-H

Pos. NO. _____ Type: H=Housing T=Terminal
Pitch 2.54mm _____ S=Straight Type R=Right Type
Pins: 1 Single layer 2 Double layer _____ Pin Number: 2-20Pin