





2.54mm(.100") Wire To Board Connector



SPECIFICATIONS:

- Current Rating:4AAC,DC
- Voltage Rating:250V AC,DC
- Operating Temperature:-40°C~+130°C
- Contact Resistance:10mΩ max.
- Insulation Resistance:5000MΩ Min.
- Withstanding Voltage:750V AC/minute
- Material:Housing:PA46 UL94V-0
Pin:Brass.Tin plated
- Mate With:M2050Series
- UL File No:E304945

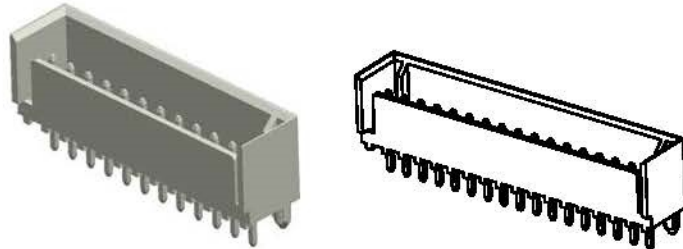

Ordering Information And Dimensions

Part NO.		Dimensions			Part NO.		Dimensions		
TYP UL94V-0	Circuits	Dim:A	Dim:B	Dim:C	TYP UL94V-0	Circuits	Dim:A	Dim:B	Dim:C
M2546-2-B-H	2	2.54	7.22	3.10	M2546-9-B-H	9	20.32	25.00	20.88
M2546-3-B-H	3	5.08	9.76	5.64	M2546-10-B-H	10	22.86	27.54	23.42
M2546-4-B-H	4	7.62	12.30	8.18	M2546-11-B-H	11	25.40	30.08	25.96
M2546-5-B-H	5	10.16	14.84	10.72	M2546-12-B-H	12	27.94	32.62	28.50
M2546-6-B-H	6	12.70	17.38	13.26	M2546-13-B-H	13	30.48	35.16	31.04
M2546-7-B-H	7	15.24	19.92	15.80	M2546-14-B-H	14	33.02	37.70	33.58
M2546-8-B-H	8	17.78	22.46	18.34	M2546-16-B-H	16	38.10	42.78	38.66



www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettenerstr. 25