
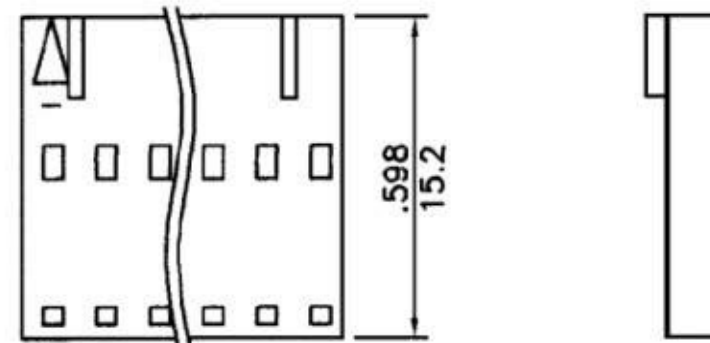
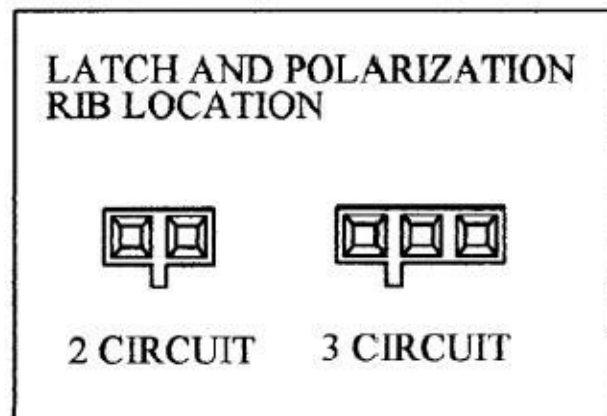


- \* Poles:2-12
  - \* Material:PBTP UL94V-0 ,BLACK
- Specifications
- \* Current rating: 2.5A AC, DC
  - \* Voltage rating: 250V AC, DC
  - \* Temperature range: -25°C~+85°C
  - \* Insulation resistance: 1,000M  $\Omega$  min.
  - \* Withstand voltage: 800V AC/minute

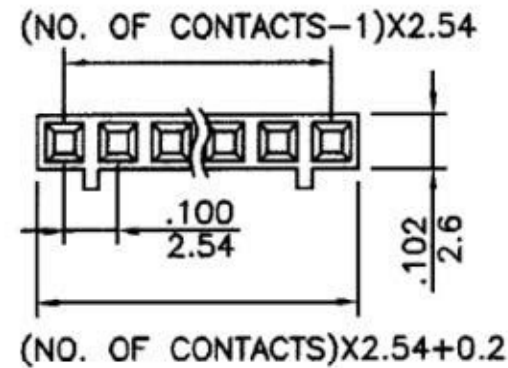

MCC-H-1Xxx-LF  
LEADFREE

02:02PIN  
12:12PIN

RoHS Compliant

Allconnectors

PART NO. MCC-H-1Xxx

DWG NO. MCC-H-1Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

X ± 0.2  
XX ± 0.1  
XXX ± .015  
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE