

Features:


- 2 ~ 12 circuits available
- PBT + GF
- Tin-plated brass pin
- .025" (0.64mm) square pin
- Standard color: Black

2P

3P


4P

odd: 5 ~ 11P even: 6 ~ 12P

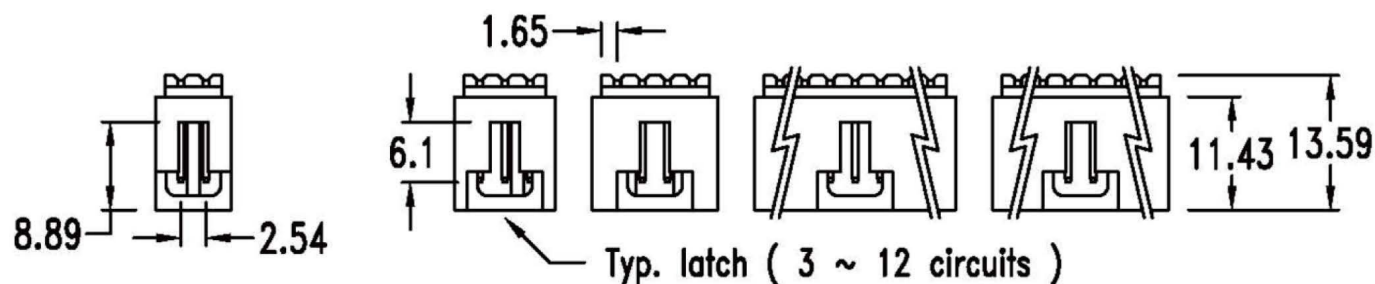


Specification:

- Current rating: 3A
- Voltage rating: 250V
- Contact resistance: 15mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(including temperature rise)

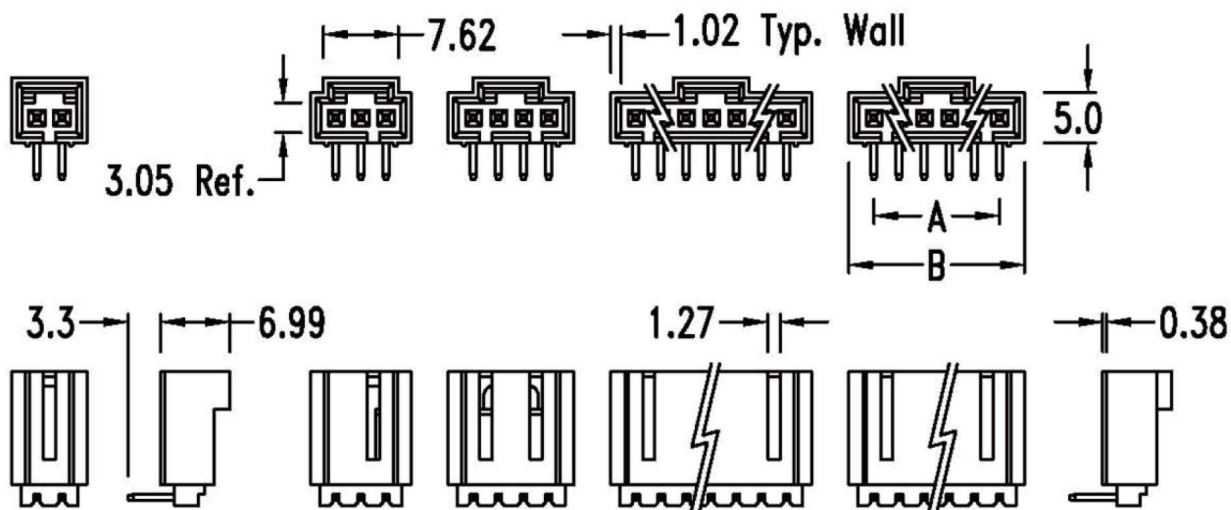

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	2.54	7.62	5	10.16	15.24	8	17.78	22.86	11	25.40	30.48
3	5.08	10.16	6	12.70	17.78	9	20.32	25.40	12	27.94	33.02
4	7.62	12.70	7	15.24	20.32	10	22.86	27.94			

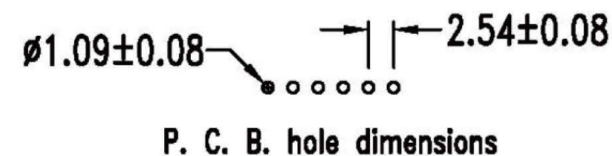

Allconnectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany


info@allconnectors.de
Fax: 0049 711 7009504
Kettenerstr. 25

RoHS Compliant


TOLERANCES ARE

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PPROJECTION

X ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

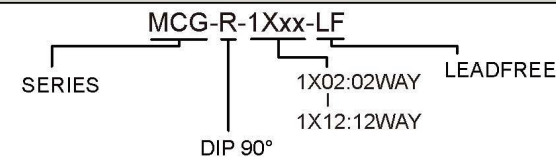

DESCRIPTION: