
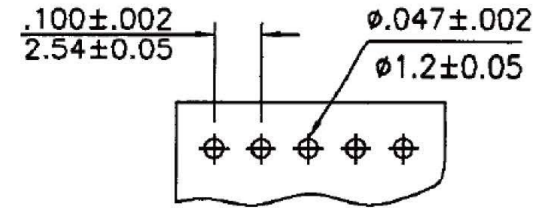




- * Poles:2-20
- * Material:Insulator:NYLON66 UL94V-2 Color:White or Henna
- * Contact:0.64mm(.025") square pin,brass,tin plated

Specifications

- * Current rating: 3A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 1,000 AC/minute
- * Applicable PC board thickness: .063" (1.6mm)



P.C. Board Layout

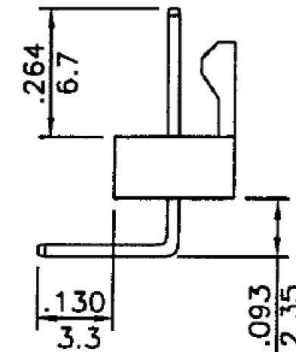

CIRCUITS	DIMENSION in.(mm)		CIRCUITS	DIMENSION in.(mm)	
	A	B		A	B
2	0.100(2.54)	0.201(5.10)	8	0.700(17.78)	0.805(20.44)
3	0.200(5.08)	0.302(7.68)	9	0.800(20.32)	0.906(23.00)
4	0.300(7.62)	0.403(10.24)	10	0.900(22.86)	1.006(25.54)
5	0.400(10.16)	0.503(12.78)	11	1.000(25.40)	1.106(28.10)
6	0.500(12.70)	0.600(15.24)	12	1.100(27.94)	1.206(30.64)
7	0.600(15.24)	0.704(17.88)			

RoHS Compliant

All Connectors

www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettnerstr. 25


TOLERANCES ARE

X ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

DRAWING BY CY
 CHECKED BY GENIUS

UNIT/ mm SCALE 1 : 1

DATE
 SIZE A4 PROJECTION



ORDER INFORMATION

MKL-R-xx-LF
 SERIES LEADFREE
 02~12WAY
 DIP 90°

DESCRIPTION: