


### SPECIFICATIONS

Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1000V AC/minute  
 Pin Material: Brass/Tin-plated  
 Material: PBT or Nylon 6T,UL94V-0

### Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MOD-D-1X02	2.54	7.70
MOD-D-1X04	7.62	12.70
MOD-D-1X06	12.70	17.80
MOD-D-1X08	17.78	22.90
MOD-D-1X09	20.32	25.40
MOD-D-1X10	22.86	28.00
MOD-D-1X12	27.94	33.10
MOD-D-1X15	35.56	40.70
MOD-D-1X22	53.34	58.50

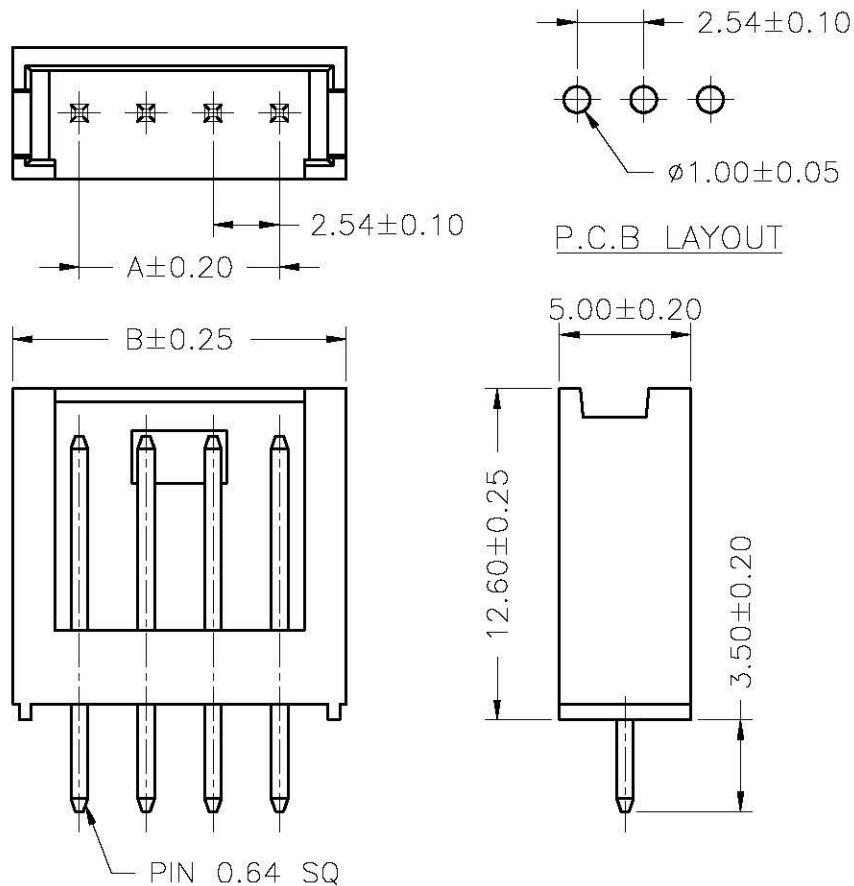

**All Connectors**

www.allconnectors.de  
 Tel.: 0049 711 7009503  
 70794 Filderstadt - Germany


info@allconnectors.de  
 Fax: 0049 711 7009504  
 Kellheimerstr. 25

**RoHS Compliant**

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE  
 SIZE A4 PROJECTION

TOLERANCES ARE

X ±  
 X ±  
 .XX ±  
 .XXX ±  
 ANG ±



### ORDER INFORMATION

MOD-D-1Xxx-LF  
 SERIES | LEADFREE  
 1X02:02WAY  
 1X22:22WAY  
 DIP 180°

DESCRIPTION: 2.54mm PITCH 180° WAFER