
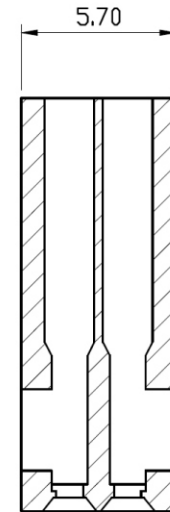
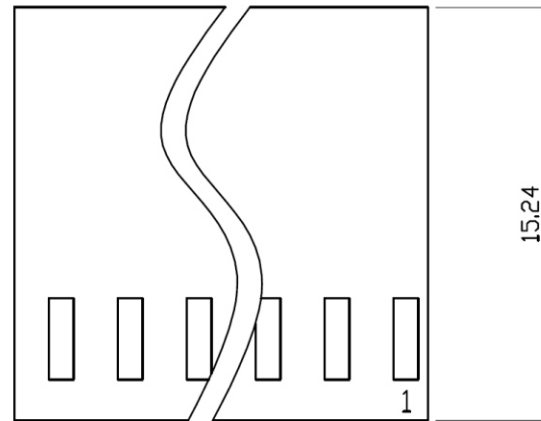


- Material: Nylon 66, UL 94V-1
- Pitch: 2.54mm
- Poles: Double row 4-80P


SPECIFICATIONS

- Current Rating: 3A AC,DC
- Voltage Rating: 250V AC,DC
- Temperature Range: -25°C~+85°C
(including temperature rise)
- Contact Resistance: Initial Value / 10M Ω Max.
After environmental testing/30M Ω Max.
- Insulation Resistance: 500M Ω Min.
- Withstanding Voltage: 1000V AC/minute
- Applicable Wire: AWG#24-26

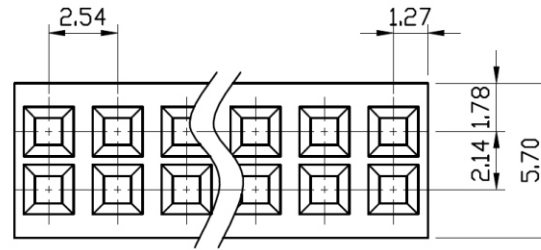

MOD4-H-2Xxx-LF
LEADFREE

RoHS Compliant

		PART NO. MOD4-H-2Xxx							
		DWG NO. MOD4-H-2Xxx		CHECKED BY CY		TOLERANCES ARE		DESCRIP TION:	
		FILE NO.		DRAWING BY		.X ± 0.2			
		UNIT / mm		SCALE 1 : 1		.XX ±		AREA	
		PROJECTION 				.XXX ±		REVISIONS	
						AWG		HK	
								DATE	

All Connectors

www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25