

NOTES:

1.MAT'L : NYLON 66 + BRASS

UNDERPLATING:NICKEL PLATING FOR ALL 50u" MIN.

SOLDER TAIL PLATING:TIN-LEAD 90/10 PLATING 100u"~2 00u"

PART NO	Dimension		PART NO	Dim ension	
	A	B		A	B
MX-S-02	2.54	5.10	MX-S-16	38.10	40.66
MX-S-03	5.08	7.64	MX-S-17	40.64	43.20
MX-S-04	7.62	10.18	MX-S-18	43.18	45.74
MX-S-05	10.16	12.72	MX-S-19	45.72	48.28
MX-S-06	12.70	15.26	MX-S-20	48.26	50.82
MX-S-07	15.24	17.80	MX-S-21	50.80	53.36
MX-S-08	17.78	20.34	MX-S-22	53.34	55.90
MX-S-09	20.32	22.88	MX-S-23	55.88	58.44
MX-S-10	22.86	25.42	MX-S-24	58.42	60.98
MX-S-11	25.40	27.96	MX-S-25	60.96	63.52
MX-S-12	27.94	30.50	MX-S-26	63.50	66.06
MX-S-13	30.48	33.04	MX-S-27	66.04	68.60
MX-S-14	33.02	35.58	MX-S-28	68.58	71.14
MX-S-15	35.56	38.12	MX-S-29	71.12	73.68

All Connectors


www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettnerstr. 25

RoHS Compliant


DRAWING BY CY
 CHECKED BY GENIUS
 UNIT/mm SCALE 1:1
 DATE
 SIZE A4 PROJECTION

TOLERANCES ARE

X ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

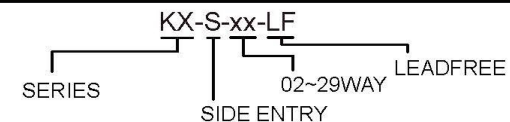

DESCRIPTION: