MIF-PRP-2Xxx-LF

LEADFREE

RoHS Compliant

Features:

- Available in 2 thru 24 circuits
- Material: UL 94V-0 + 30% GF
- .025"(0.64mm) square pins
- Tin-plated brass pin
- Standard color: Black

Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V
- Contact resistance: 10mΩ Max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.
  (carry rated current load)

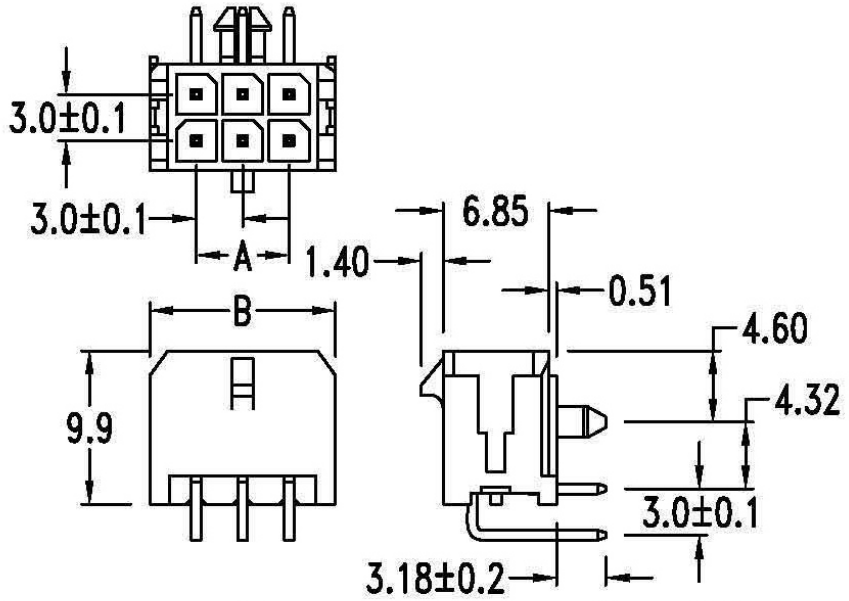

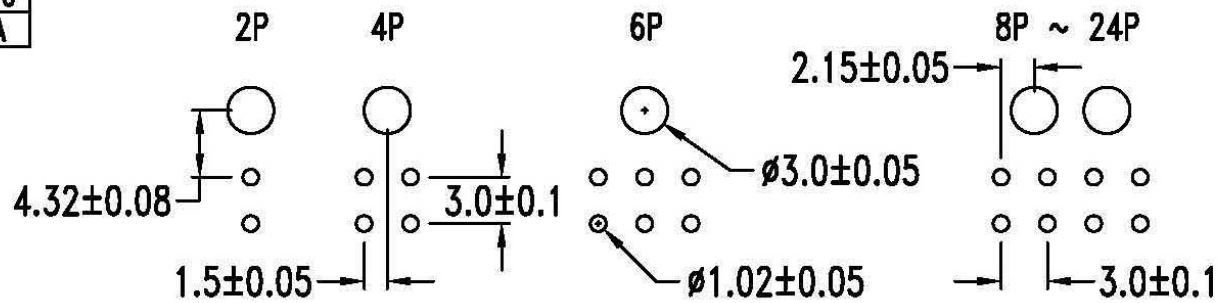

PCB Layout: Component side

Recommended PCB thickness:.062"(1.57mm)

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		6.65	6	6.0	12.65	10	12.0	18.65	14	18.0	24.0	18	24.0	30.65	22	30.0	36.65
4	3.0	9.65	8	9.0	15.65	12	15.0	21.65	16	21.0	27.0	20	27.0	33.65	24	33.0	39.65

AllConnectors
www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

PART NO. MIF-PRP-2Xxx			
DWG NO. MIF-PRP-2Xxx	CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG	DESCRIP TION:
FILE NO.	DRAWING BY		
UNIT / mm / SCALE 1 : 1	PROJECTION	AREA / REVISIONS / HK / DATE	