





ROHS




04P






06P




08P





10P

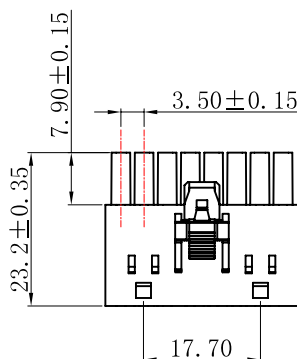

12P



14P



16P

Specifications:

- Voltage rating: 400V AC/DC
- Current rating: 8A AC/DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40° C ~ +120° C
- Insulation resistance: ≥1000MΩ
- Wire range: 16~22AWG
- Plastic material: PAXX UL 94V-0
- Poles: 4~16P

8350 H XX W 1 3 04

Series:

Title: H-HSG (Housing)

Circuit number: XXP

Category: W-Wire B-Board

Color:

1-Black 2-Natural

Plastic material:

3-PA66 9-PA4T

Special code:

04-Double row Left key with button

Poles	Dimensions	
	A	B
4	3.50	8.20
6	7.00	11.70
8	10.50	15.20
10	14.00	18.70
12	17.50	22.20
14	21.00	25.70
16	24.50	29.20

GENERAL TOLERANCE

- .X ±0.3
- .XX ±0.2
- .XXX ±0.1

Part NO:

8350HXXW1304

TITLE:

XXP 4.60X3.50mm Power Wire-D HSG

Allconnectors


www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25

2017/06/16

A

PROJECT



UNIT
MM

SCALE
1:1

PAGE
1 OF 1

EDITION
A

APPROVED

CHECK

DRAW

DATA

FILE NUMBER

DATA

EDITION

DESCRIPTION

DRAW

Kuang

LSTC-HS-011