
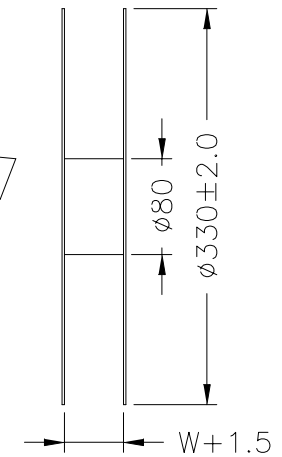
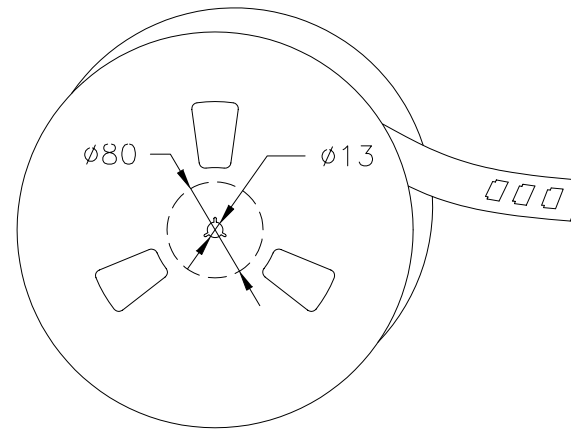


SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 1400V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: $20\text{m}\Omega$ Max
 Insulation Resistance: $1000\text{M}\Omega$ Min
 Withstanding Voltage: 3800V AC/minute
 Pin Material: Brass/Tin-plated
 Solder Tabs: Brass/Tin-plated
 Material: Nylon 6T,UL94V-0

BHS-W-02-LF
LEADFREE
RoHS Compliant

Allconnectors
 www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

PART NO. BHS-W-02		CHECKED BY CY		TOLERANCES ARE .X \pm 0.2 .XX \pm .XXX \pm AWG	DESCRIP TION: 3.50mm PITCH 90° WAFER-SMT TYPE ULTRA LOW PROFILE			
DWG NO. BHS-W-02		DRAWING BY			AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1	PROJECTION						

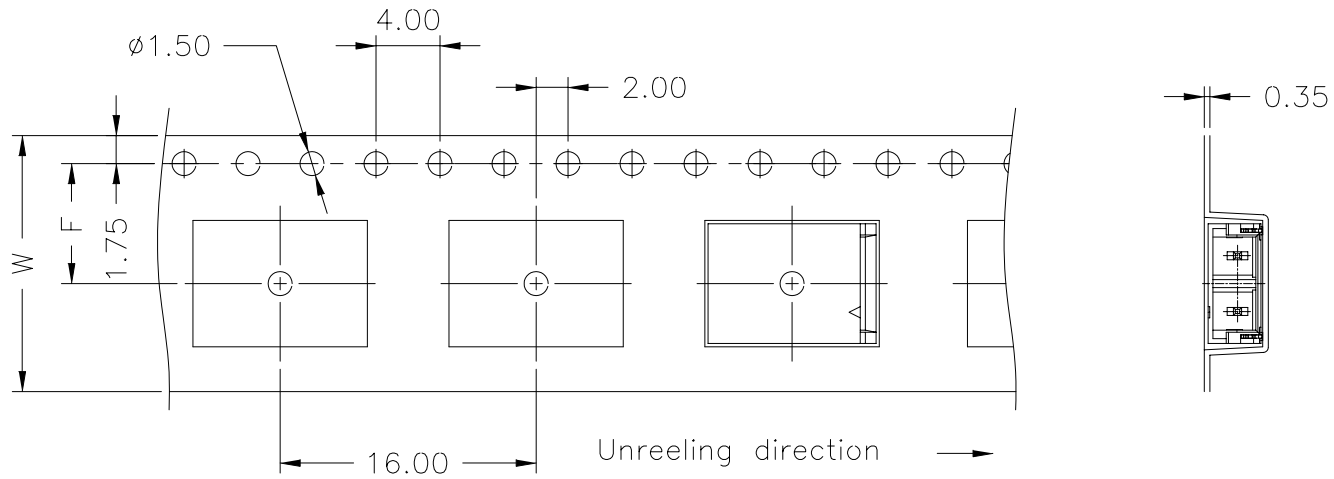

Number of Contacts	W±0.3	F±0.1	Q'ty/Reel
2P	16	7.50	1,000

All Connectors

www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

PART NO. BHS-W -02

DWG NO. BHS-W -02

FILE NO.

UNIT / mm SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X±
.XX±
.XXX±
AWG

DESCRIPTION:

AREA

REVISIONS

**3.50mm PITCH
90° WAFER-SMT TYPE
TAPING SPEC.**

HK

DATE