

SPECIFICATIONS:


Current rating:5.0AAC,DC
 Voltage rating:250V AC,DC
 Contact resistance:20MΩ max
 Insulation resistance: 1,000MΩ min
 Withstanding voltage:1,500V AC/minute
 Temperature range:-25°C to +125°C
 Application wires:AWG#26 to #18

MATERIAL:



Insulator: Nylon 66 UL94V-0
 Contact: Brass
 Finish: Tin Plated
 PS-F- 1 8 : (7,000 pcs In One Roll)

PS-F-18-LF

LEADFREE

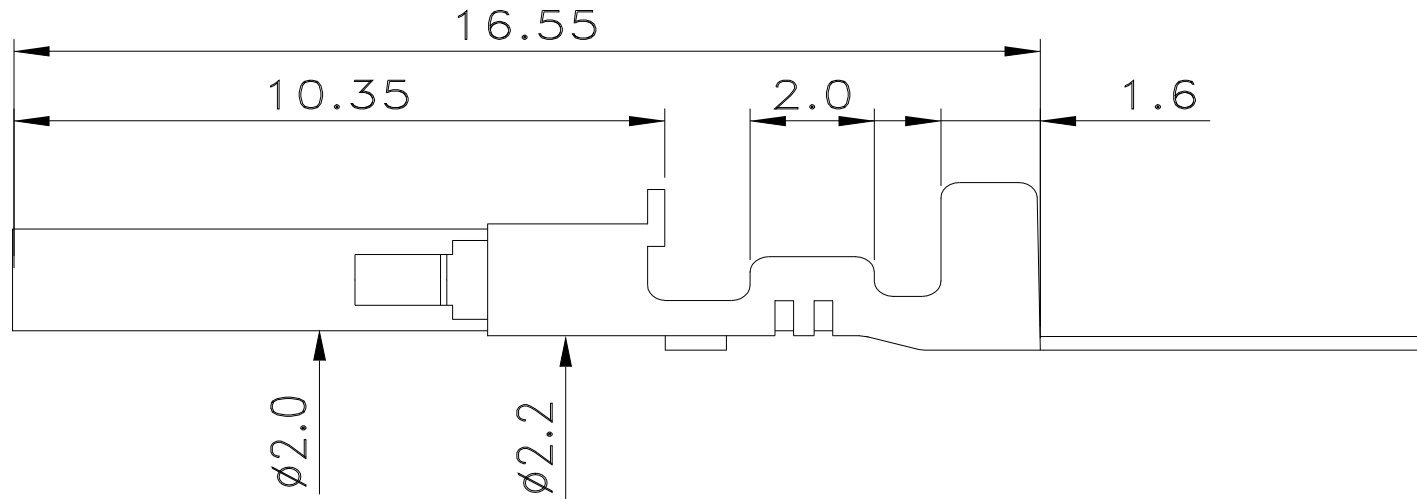

RoHS Compliant

A	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25		PART NO. PS-F-18		CHECKED BY CY DRAWING BY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION:			
	UNIT / mm	SCALE 1:1	PROJECTION 	AREA			REVISIONS	HK	DATE	