


SPECIFICATIONS:

Current rating:5.0A AC,DC
 Voltage rating:250V AC,DC
 Contact resistance:20MΩ max
 Insulation resistance: 1,000MΩ min
 Withstanding voltage:1,500V AC/minute
 Temperature range:-25°C to +125°C
 Application wires:AWG#26 to #18

MATERIAL:

Insulator: Nylon 66 UL94V-0
 Contact: Brass
 Finish: Tin Plated
 PS-M-18: (7,000 pcs In One Roll)

PS-M-18-LF
 LEADFREE
 RoHS Compliant

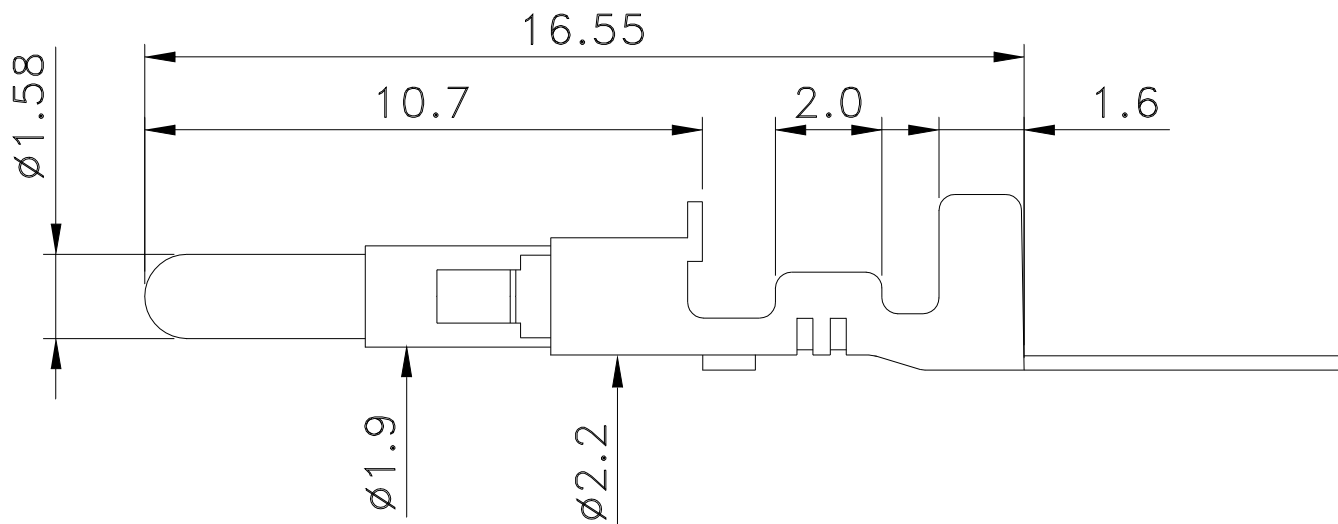

B	PART NO. PS-M-18		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:				
	DWG NO. PS-M-18								DRAWING BY
A	www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25		UNIT / mm	SCALE 1:1	PROJECTION	AREA	REVISIONS	HK	DATE
	FILE NO.		PROJECTION						