


PS-P-1Xxx-LF  
LEADFREE

RoHS Compliant

Specifications:  
 Current rating:5.0 AC/DC  
 Voltage rating:250V AC/DC  
 Contact resistance:20m ohm. max.  
 Insulator resistance:1000M ohm. Min.  
 Withstanding voltage:1500V AC for one minute  
 Operating temperture range:-25°C to + 105°C  
 Application wire:AWG#26 TO #18  
 Material and Finish:  
 Insulator:high Temp. Plastic(UL94V-2)

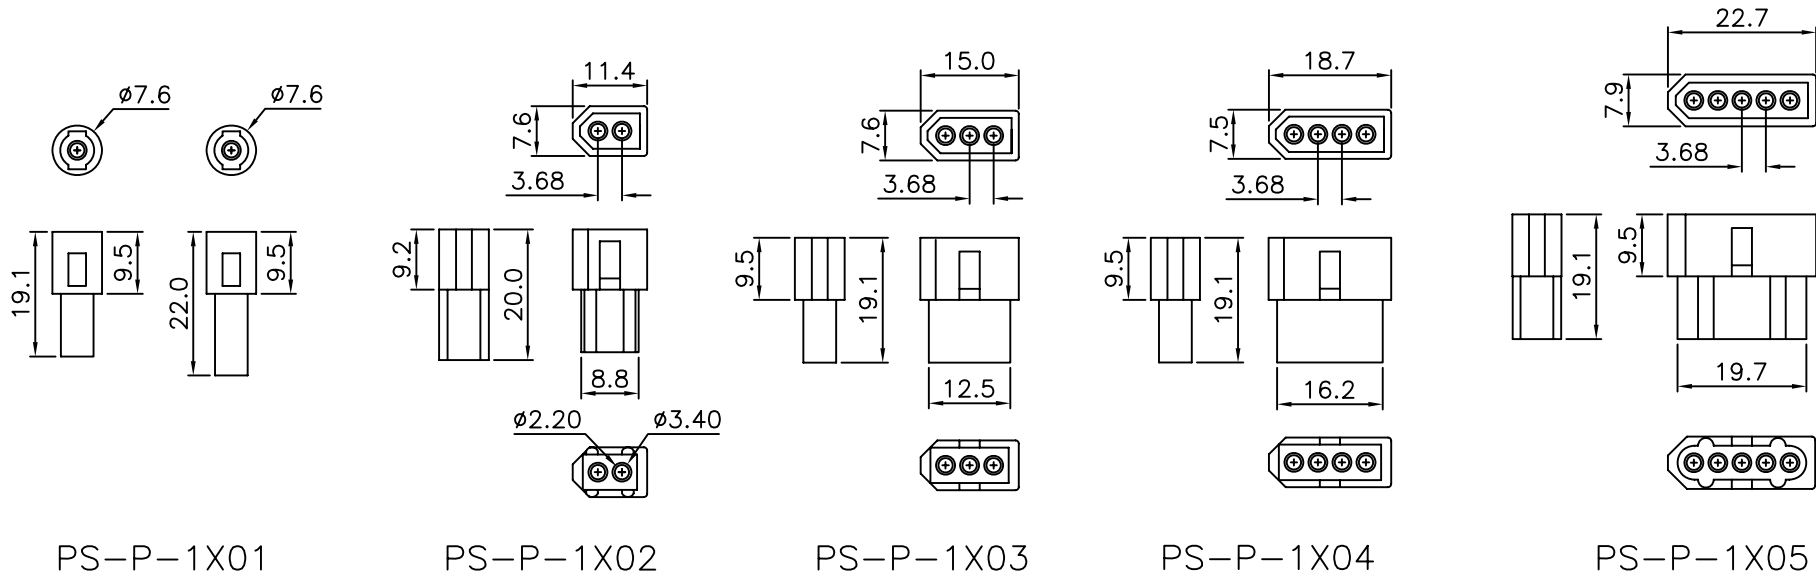

PART NO. PS-P-1Xxx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: Receptacle Housing Withoht Ear	AREA	REVISIONS	HK	DATE
DWG NO. PS-P-1Xxx		DRAWING BY							
UNIT / mm		SCALE 1:1	PROJECTION						