

PS-S-3Xxx-LF  
LEADFREE

RoHS Compliant

Specifications:

Current rating:5.0 AC/DC

Voltage rating:250V AC/DC

Contact resistance:20m ohm. max.

Insulator resistance:1000M ohm. Min.












Withstanding voltage:1500V AC for one minute

Operating temperature range:-25°C to + 105°C

Application wire:AWG#26 TO #18

Material and Finish:

Insulator:high Temp. Plastic(UL94V-2)

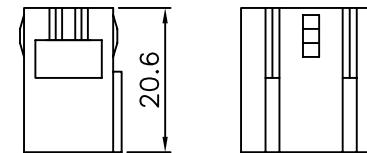


PS-S-3X02

PS-S-3X03

PS-S-3X04

PS-S-3X05

PART NO. PS-S-3Xxx		CHECKED BY CY		TOLERANCES ARE .X±0.2 .XX± .XXX± AWG	DESCRIPTION: Plug Housing With Ear	AREA	REVISIONS	HK	DATE
DWG NO. PS-S-3Xxx		DRAWING BY							
FILE NO.		PROJECTION 							
UNIT / mm	SCALE 1:1								