

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C



Insulation Resistance: 1000MΩ / min.

Dielectric Withstanding Voltage: 1500V AC / min.



Contact Resistance: 10mΩ / max.

Material

Material: Nylon66, UL94V-2

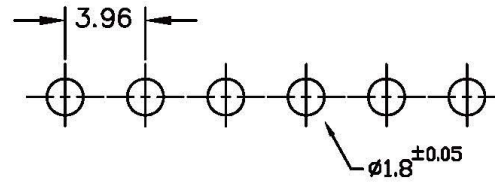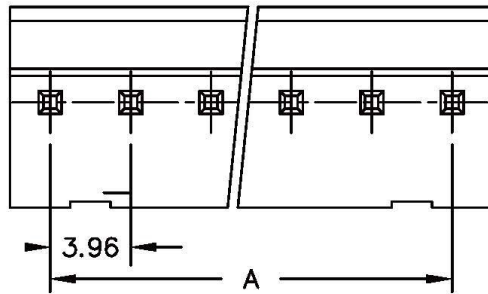

RECOMMENDED P.C.BOARD HOLE DIMM.

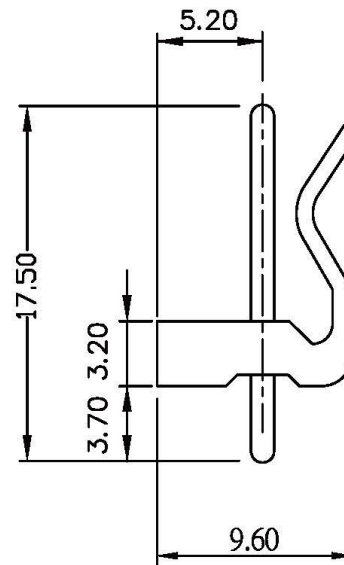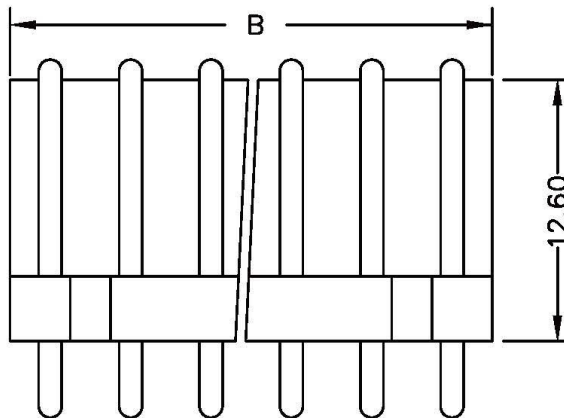

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
2	3.96	7.92	KK-DRP-02	
3	7.92	11.88	KK-DRP-03	
4	11.88	15.84	KK-DRP-04	
5	15.84	19.80	KK-DRP-05	
6	19.80	23.76	KK-DRP-06	
7	23.76	27.72	KK-DRP-07	
8	27.72	31.68	KK-DRP-08	
9	31.86	35.64	KK-DRP-09	
10	35.64	39.60	KK-DRP-10	
11	39.60	43.56	KK-DRP-11	
12	43.56	47.52	KK-DRP-12	

All Connectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettenerstr. 25


RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4


TOLERANCES ARE

X ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION



ORDER INFORMATION

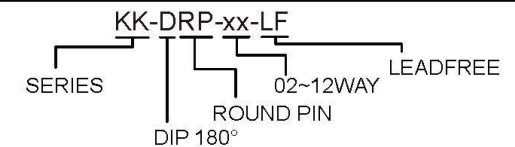

DESCRIPTION: 3.96mm Wire-to-Board Header Dip 180° Type