

# SPECIFICATIONS

## Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C




Insulation Resistance: 1000mΩ / min.

Dielectric Withstanding Voltage: 1500V AC/ min.

Contact Resistance: 10mΩ / max.

## Material

Material: Nylon66, UL94V-2

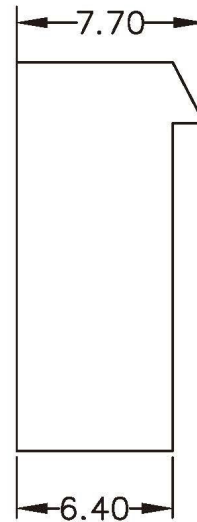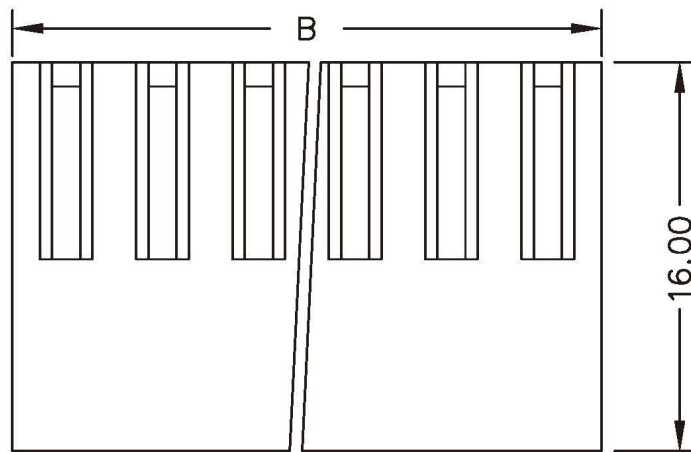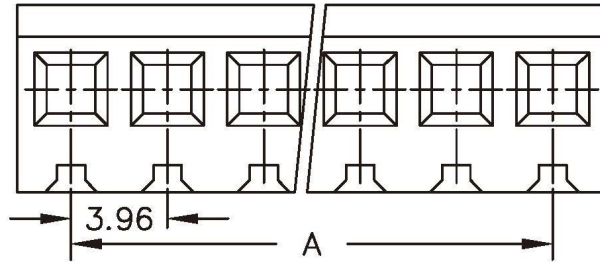

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
2	3.96	8.45	KK-H-02	
3	7.92	12.39	KK-H-03	
4	11.88	16.35	KK-H-04	
5	15.84	20.31	KK-H-05	
6	19.80	24.27	KK-H-07	
7	23.76	28.23	KK-H-08	
8	27.72	32.19	KK-H-09	
9	31.68	36.15	KK-H-10	
10	35.64	40.11	KK-H-11	
11	39.60	44.07	KK-H-12	
12	43.56	48.03	KK-H-13	
13	47.52	51.99	KK-H-14	
14	51.48	55.95	KK-H-15	
15	55.44	59.91	KK-H-16	
16	59.40	63.87	KK-H-17	
17	63.36	67.83	KK-H-18	
18	67.32	71.79	KK-H-19	
20	75.24	79.71	KK-H-20	

**RoHS Compliant**

**All Connectors**

www.allconnectors.de info@allconnectors.de  
Tel.: 0049 711 7009503 Fax: 0049 711 7009504  
70794 Filderstadt - Germany Kettenerstr. 25

**TOLERANCES ARE**

X ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

DRAWING BY CY  
CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PROJECTION



**ORDER INFORMATION**

KK-H-xx-LF

SERIES | HOUSING | 02~20WAY | LEADFREE

**DESCRIPTION: 3.96mm Wire-to-Board Housing**