
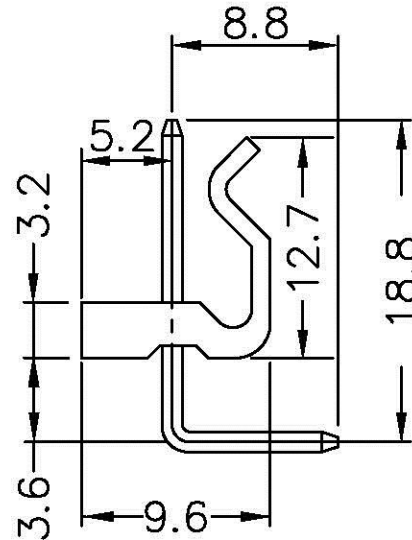
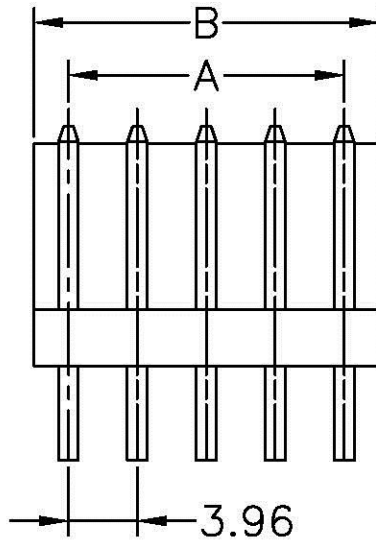


MATERIAL: NYLON 66.UL94V-2  
 CURRENT RATING: 7A  
 VOLTAGE RATING: 250V/AC

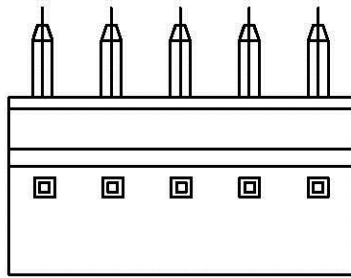

CIRCUITS	PART NO	DIMENSION	
		A	B
2	KK-RV-02	3.96	7.92
3	KK-RV-03	7.92	11.88
4	KK-RV-04	11.88	15.84
5	KK-RV-05	15.84	19.80
6	KK-RV-06	19.80	23.76
7	KK-RV-07	23.76	27.72
8	KK-RV-08	27.72	31.68
9	KK-RV-09	31.68	35.64
10	KK-RV-10	35.64	39.60
11	KK-RV-11	39.60	43.56
12	KK-RV-12	43.56	47.52
13	KK-RV-13	47.52	51.48
14	KK-RV-14	51.48	55.44
15	KK-RV-15	55.44	59.40
16	KK-RV-16	59.40	63.36
17	KK-RV-17	63.36	67.32
18	KK-RV-18	67.32	71.28
19	KK-RV-19	71.28	75.24
20	KK-RV-20	75.24	79.20

**All Connectors**

www.allconnectors.de  
 Tel.: 0049 711 209 1000  
 70794 Filzstätt, Germany

info@allconnectors.de  
 Fax: 0049 711 209 1004  
 Kottbamerstr. 25

PART NO. KK-RV-xx

DWG NO. KK-RV-xx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

A,B尺寸公差如下  
 .X = 0.5±0.5  
 .XX = 0.3±0.5

DESCRIPTION:	3.96mm CONNECTOR WAFER			
AREA	REVISIONS	HK	DATE	