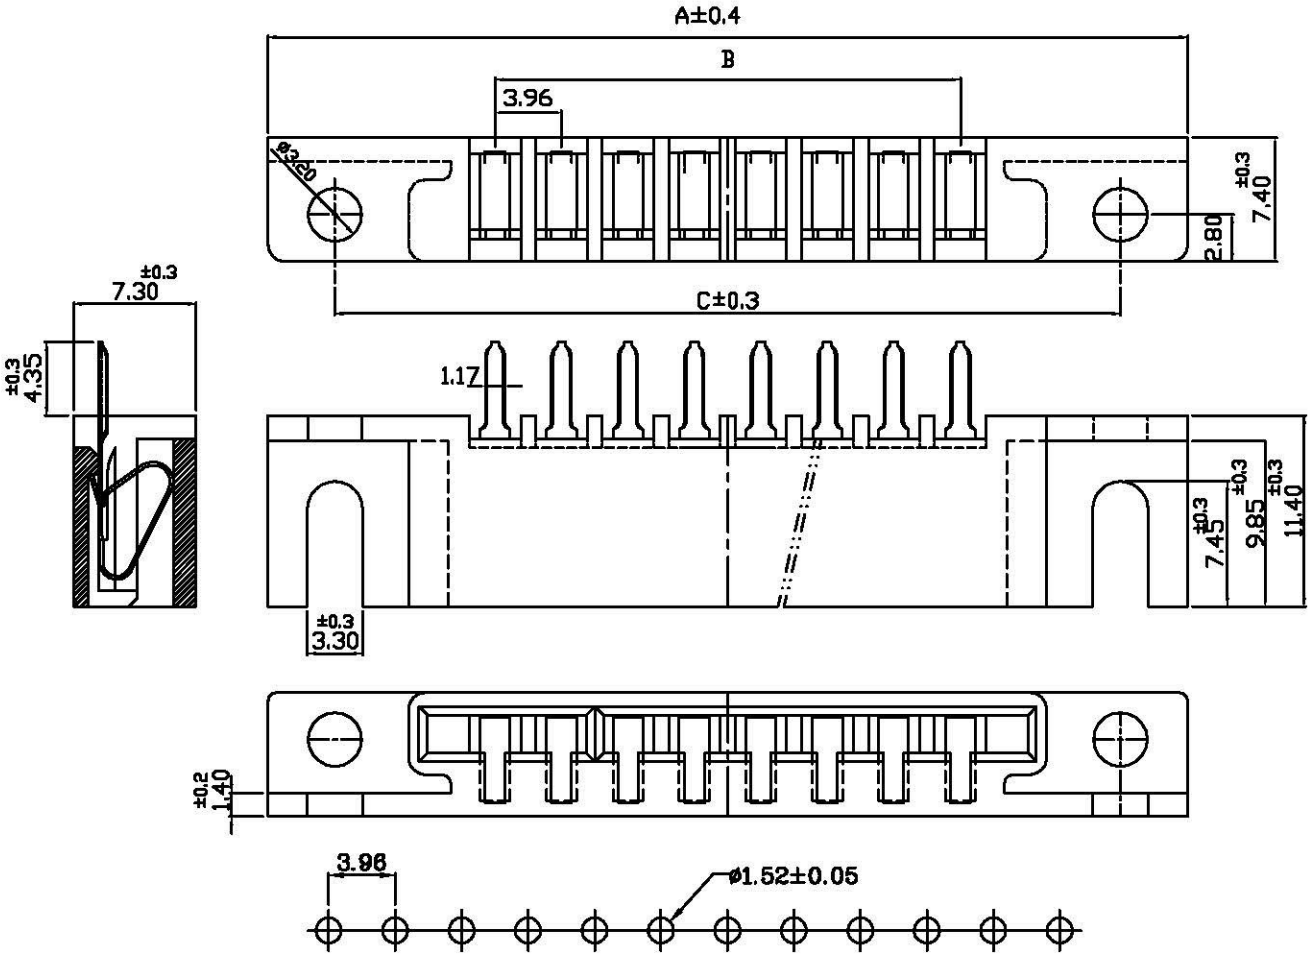

P.C.B LAYOUT

MAT'L: NYLON 66 UL94V-2
THICKNESS: 0.25mm
MAT'L: BRASS TIN PLATED
CURRENT RATING: 5A AC,DC
VOLTAGE RATING: 250V AC,DC

PART NO.	DIM"A"	DIM"B"	DIM"C"
KKE-DE-08	54.80	27.72	46.80
KKE-DE-15	82.50	55.44	74.50

RoHS Compliant

All Connectors
www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany
info@allconnectors.de
Fax: 0049 711 7009504
Kettelerstr. 25

DRAWING BY	CY
CHECKED BY	GENIUS
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

KKE-DE-xx-LF
SERIES
EAR
DIP 180°
08.15WAY
LEADFREE

DESCRIPTION: