

P.C.B LAYOUT

NO. OF CONTACT	Dimension		NO. OF CONTACT	Dimension	
	A	B		A	B
02	3.96	8.06	10	35.64	39.74
03	7.92	12.02	11	39.60	43.70
04	11.88	15.98	12	43.56	47.66
05	15.84	19.94	13	47.52	51.62
06	19.80	23.90	14	51.48	55.58
07	23.76	27.86	15	55.44	59.54
08	27.72	31.82	16	59.40	63.50
09	31.68	35.78			

NOTES:

SPECIFICATION

1. Current : 5A max.
2. Voltage: 250V AC max.
3. Insulation Resistance: 1000 MΩ min.
4. Contact Resistance: 10mΩ max.
5. Dielectric Withstanding Voltage: 1500V AC
6. Temperature: -40°C to +105°C

MATERIAL

1. Contact: Brass
2. Housing: Nylon, UL 94V-2
3. Plated: Tin Plating(Lead Free)

All Connectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25


RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4


TOLERANCES ARE

X ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

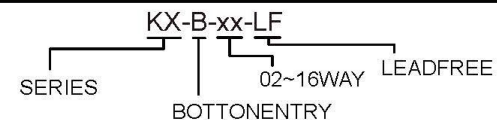

DESCRIPTION: