

NO. OF CONTACT	Dimension		NO. OF CONTACT	Dimension	
	A	B		A	B
02	3.96	8.06	10	35.64	39.74
03	7.92	12.02	11	39.60	43.70
04	11.88	15.98	12	43.56	47.66
05	15.84	19.94	13	47.52	51.62
06	19.80	23.90	14	51.48	55.58
07	23.76	27.86	15	55.44	59.54
08	27.72	31.82	16	59.40	63.50
09	31.68	35.78			



NOTES:

SPECIFICATION

- 1.Current : 5A max.
- 2.Voltage: 250V AC max.
- 3.Insulation Resistance: 50K Megohms Min.
- 4.Contact Resistance: 6 Milliohms Max.
- 5.Dielectric Withstanding Voltage: 1500V AC
- 6.Temperature: 0°C to +75°


MATERIAL

- 1.Contact: Brass
- 2.Housing:Nylon,UL 94V-2
- 3.Plated: Tin Plating

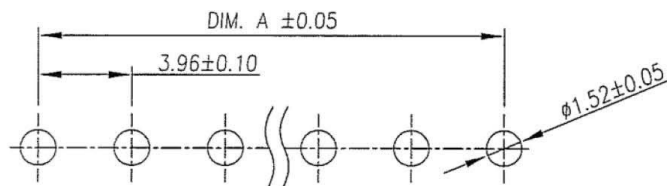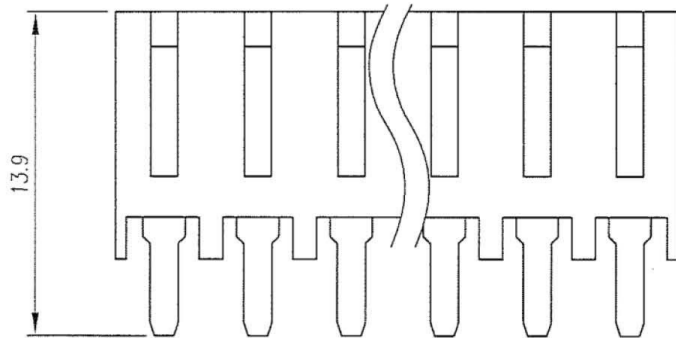

P.C.B LAYOUT

<p>www.allconnectors.de Tel.: 0049 711 7009503 70794 Filderstadt - Germany</p>	RoHS Compliant		<p>TOLERANCES ARE</p> <p>X. ± .X ± .XX ± .XXX ± ANG ±</p>
	DRAWING BY CY		
	CHECKED BY GENIUS		
	UNIT/ mm	SCALE 1 : 1	
	DATE		
SIZE A4	PROJECTION		



ORDER INFORMATION	
	<p>DESCRIPTION:</p>