

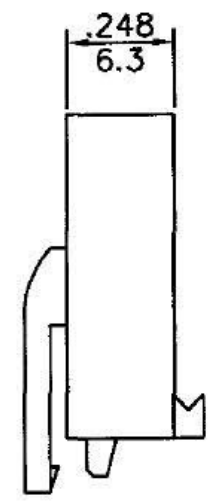


- * Poles:6
 - * Material:NYLON 66 UL94V-2 White
- Specifications**
- * Current rating: 7A AC, DC
 - * Voltage rating: 250V AC, DC
 - * Temperature range: -25°C~+85°C
 - * Insulation resistance: 1,000MΩ min.
 - * Withstand voltage: 1500V AC/minute

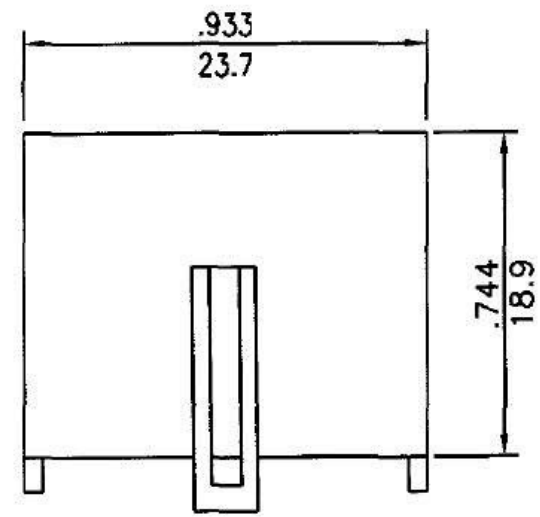

PB-H-06-LF
LEADFREE
RoHS Compliant

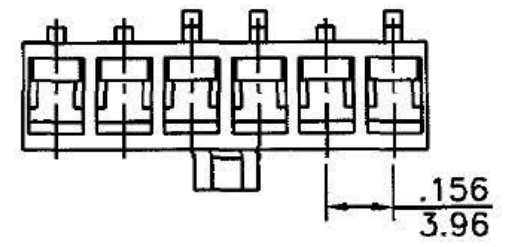

www.allconnectors.com
TEL: 0017 073 4102699
AL2981 (1) (Rev. 01.12.2019)

info@allconnectors.com
TEL: 0017 073 4102699
info@allconnectors.com

PART NO. PB-H-06

DWG NO. PB-H-06

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

X ± 0.2
XX ± 0.1
XXX ±
AWG

DESCRIPTION:

UNIT / mm

SCALE 1:1

PROJECTION

AREA

REVISIONS

HK

DATE