



SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1800V AC/minute
 Pin Material: Brass/Tin-plated
 Solder Tabs: Brass/Tin-plated
 Material: Nylon 6T,UL94V-0
 Color: Natural(Beige)

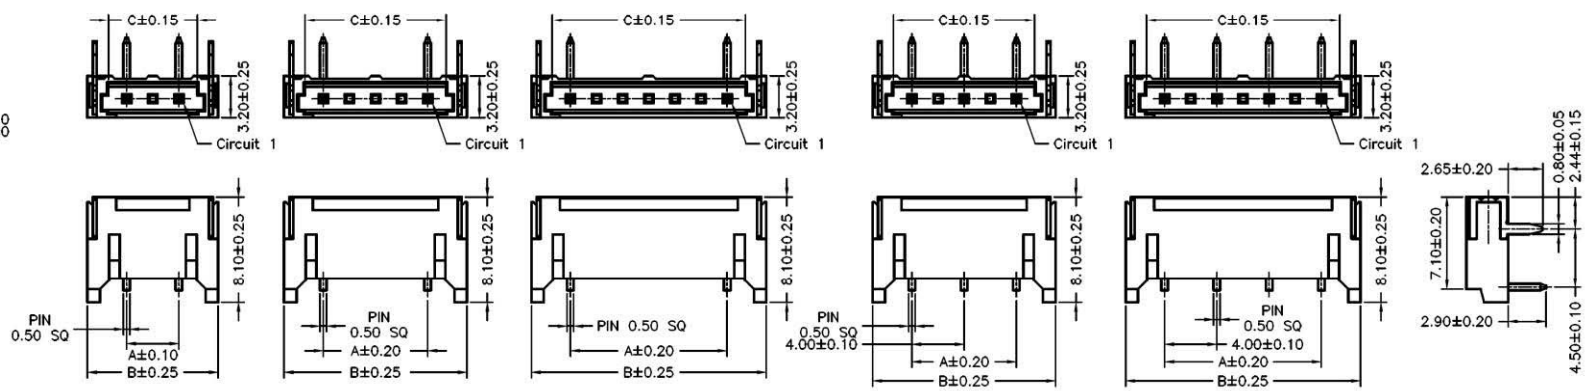

BH-R-0302 BH-R-0502 BH-R-0702 BH-R-0503 BH-R-0704

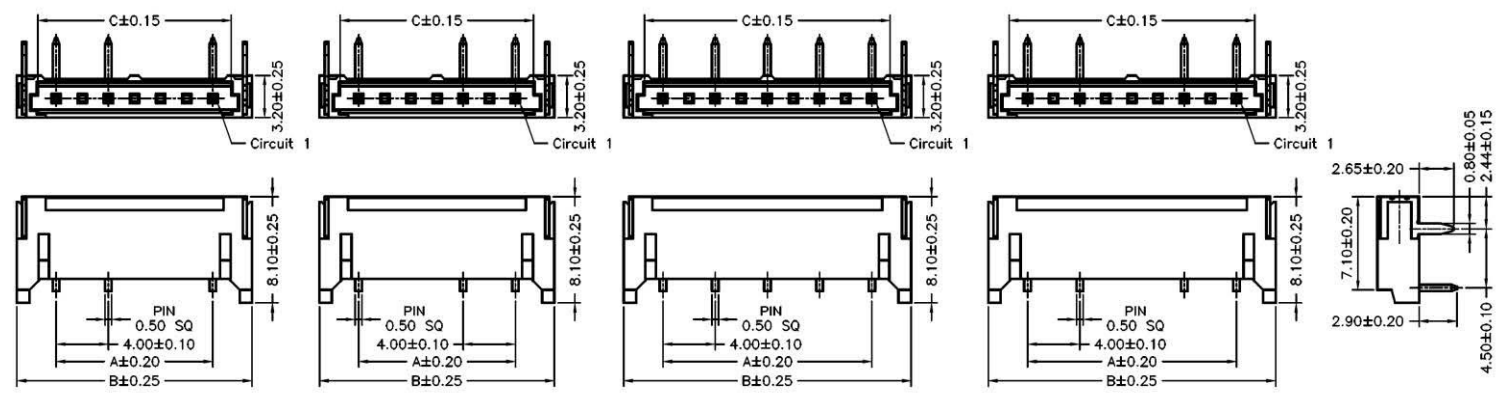

BH-R-0703EL BH-R-0703ER BH-R-0905 BH-R-0904

BH-R-xxxx-LF
 LEADFREE
 RoHS Compliant

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
BH-R-0302	4.00	10.00	6.80
BH-R-0502	8.00	14.00	10.80
BH-R-0702	12.00	18.00	14.80
BH-R-0503	8.00	14.00	10.80
BH-R-0704	12.00	18.00	14.80
BH-R-0703EL	12.00	18.00	14.80
BH-R-0703ER	12.00	18.00	14.80
BH-R-0905	16.00	22.00	18.80
BH-R-0904	16.00	22.00	18.80

Allconnectors
 www.allconnectors.de
 Tel.: 0049 711 7009503
 70794 Filderstadt - Germany

info@allconnectors.de
 Fax: 0049 711 7009504
 Kettnerstr. 25

PART NO. BH-R-xxxx		CHECKED BY CY		TOLERANCES ARE .X±0.2 .XX± .XXX± AWG	DESCRIP TION:
DWG NO. BH-R-xxxx		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE