
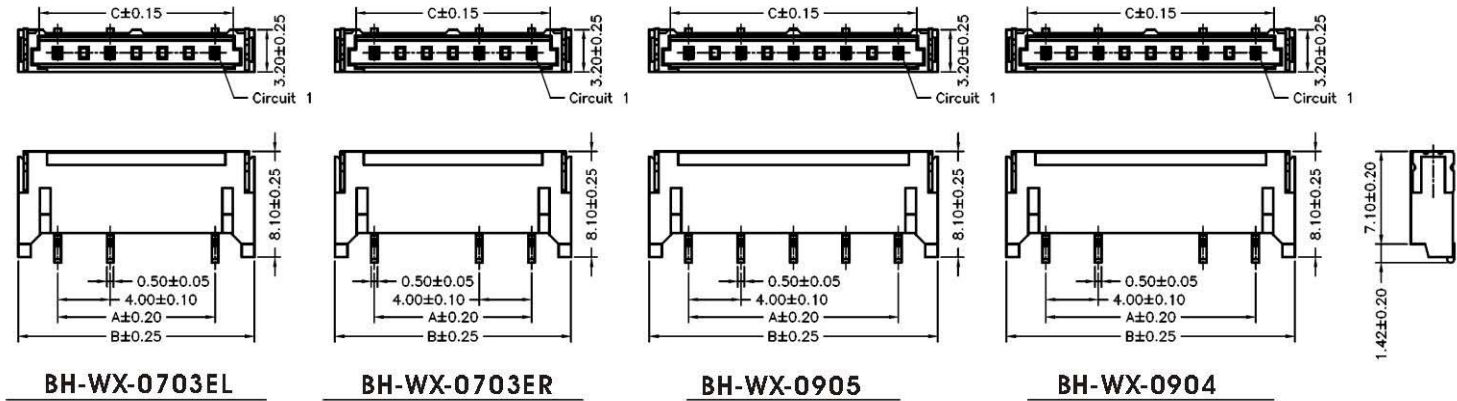


SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1800V AC/minute
 Pin Material: Brass/Tin-plated
 Solder Tabs: Brass/Tin-plated
 Material: Nylon 6T,UL94V-0
 Color: Natural(Beige)

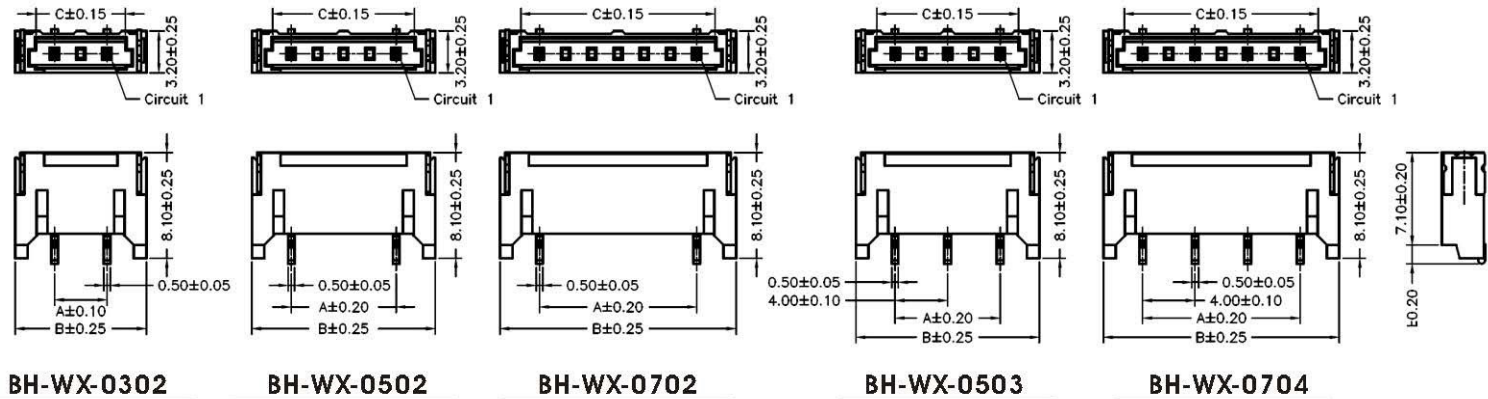

BH-WX-xxxx-LF
 LEADFREE
 RoHS Compliant

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
BH-WX-0302	4.00	10.00	6.80
BH-WX-0502	8.00	14.00	10.80
BH-WX-0702	12.00	18.00	14.80
BH-WX-0503	8.00	14.00	10.80
BH-WX-0704	12.00	18.00	14.80
BH-WX-0703EL	12.00	18.00	14.80
BH-WX-0703ER	12.00	18.00	14.80
BH-WX-0905	16.00	22.00	18.80
BH-WX-0904	16.00	22.00	18.80

Allconnectors

www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7095203 Fax: 0049 711 7095204
 70794 Filderstadt - Germany Kettnerstr. 25

PART NO. BH-WX-xxxx

DWG NO. BH-WX-xxxx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE