




Specifications  
 Current Rating:3Amp  
 Insulation Resistance:1000MΩMin.  
 Dielectric Withstanding Voltage:600VAC  
 Contact Resistance:20mΩMax.  
 Operating Temperature:-40°C to +105°C  
 Materials  
 Contact Material:Phosphor Bronze  
 Insulator Material:Polyester,UL 94V-0  
 PA 6T or the  
 equivalent material  
 All materials must meet Greenconn  
 requirement for environment protection.



Recommended P.C.Board  
 Layout  
 (Tolerance:±0.05)

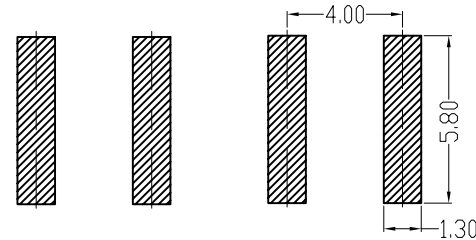

### Ordering Information

LEDT - XX XX

No. of Pins Per Row: 02, 04, 06  
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating  
 Packing: T=Tube, TP=Tape+Reel

GENERAL TOLERANCE		ANGLE TOLERANCE		DESIGN	DATE	 <a href="http://www.allconnectors.eu">www.allconnectors.eu</a>   <a href="mailto:info@allconnectors.eu">info@allconnectors.eu</a> Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25	
X.	± 0.38	X°.	±5°	Andy2005. 08. 12			
.X	±0.25	.X°	±2°	CHECK	DATE	FILE NAME (品名)	LED Connector Male
.XX	±0.13	.XX°	±1°	APPRO.	DATE	PART NO (料号)	LEDM2-XXXXXXLBX
.XXX	±0.13	.XXX°	±0.5°			DRAWING NO.(图号)	LEDM2-05
UNIT:mm	SCALE	1:1			REV.AO		
A4	SHEET: 1 of 1						