


4. 14mm WIRE TO WIRE CONNECTOR, DISCRETE WIRE SOCKET HOUSING PLASTIC LATCHES, ROHS COMPLIANT

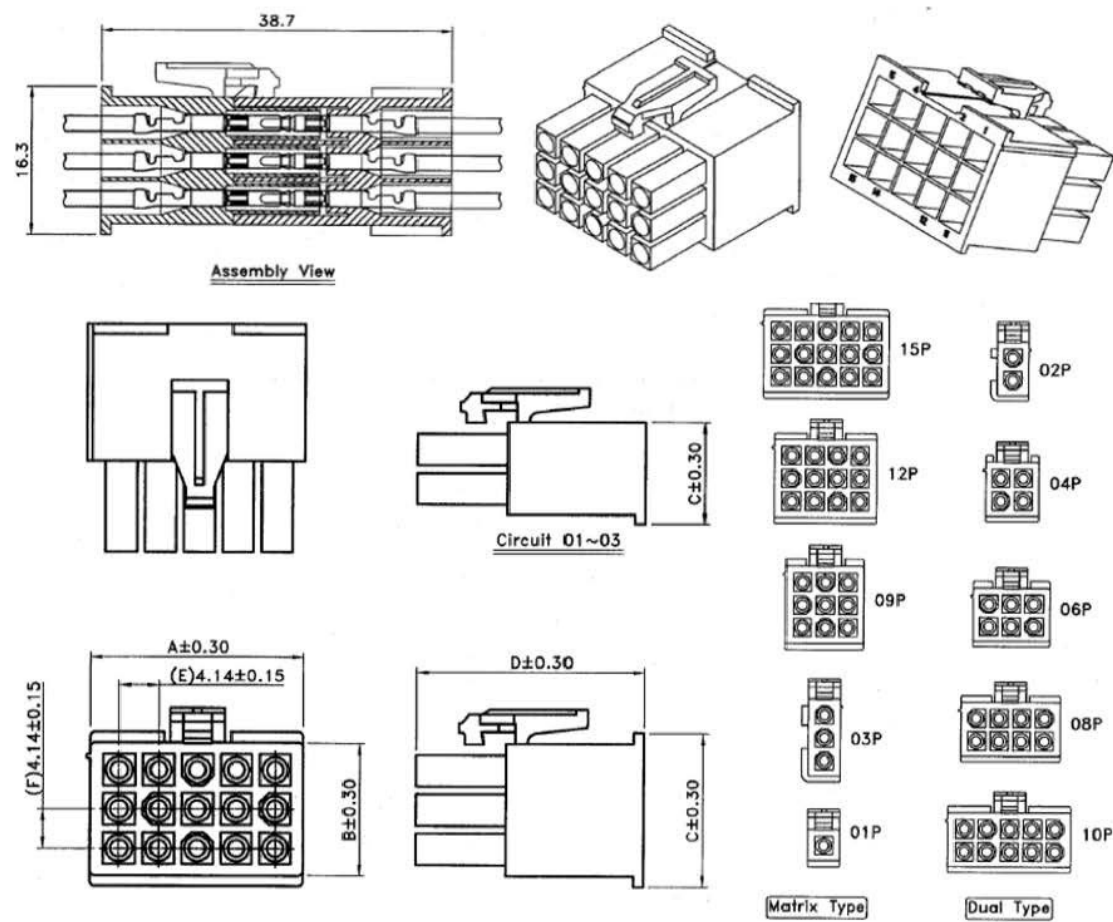

Material Information:
 Housing material:
 Nylon 66, UL94V-2 rated
 Poles available:
 01-04, 06, 08-10, 12, 15
 All materials compliant with ROHS

Technical Specifications:
 Current rating:
 3A (15 circuit, UL1007 AWG24) min. 9A (02 circuit, UL1007 AWG 18) max.
 Withstanding voltage: 1500V AC/minute
 Insulation resistance: 1000MΩ min.
 Contact resistance: 20MΩ max.
 Operating temp range: -25°C to +90°C

Ordering Information
 HSP - 414 XX
 ① No. of positions: 01, 02, 03, 04, 06, 08, 09, 10, 12, 15

Dual Type

Poles	Dimensions (mm)			
	A	B	C	D
02	5.8	9.8	10.8	24.1
04	9.8		12.0	
06	14.0		12.0	
08	18.2		12.0	
10	22.5		12.0	

Matrix Type

Poles	Dimensions (mm)			
	A	B	C	D
01	5.8	5.6	6.8	24.1
03	5.8	14.0	15.0	
09	14.1	14.1	16.5	24.2
12	18.4	14.1	16.3	
15	22.6	14.1	16.3	

All Connectors
 www.allconnectors.de
 Tel.: 0049 711 7095505
 70794 Filberstadt - Germany

info@allconnectors.de
 Fax: 0049 711 7095504
 Kettnerstr. 25

绘图 (DRAWN)	孙高田	投影 (PROJECT)	
审核 (CHECKED)	刘思晴	单位 (UNIT)	MM
核准 (APPROVE)		比例 (SCALE)	1:1
		版本 (EDITION)	A
		日期 (DATE)	2013/12/14

公差 (TOLERANCE)	料号 (PART NO)	HSP - 414 XX
0.0 ± 0.30	品名 (NAME)	
0.00 ± 0.20	4.14 线对线连接器 标准	