


### 4. 14mm WIRE TO WIRE CONNECTOR, DISCRETE WIRE TERMINAL HOUSING FREE-HANGING, ROHS COMPLIANT

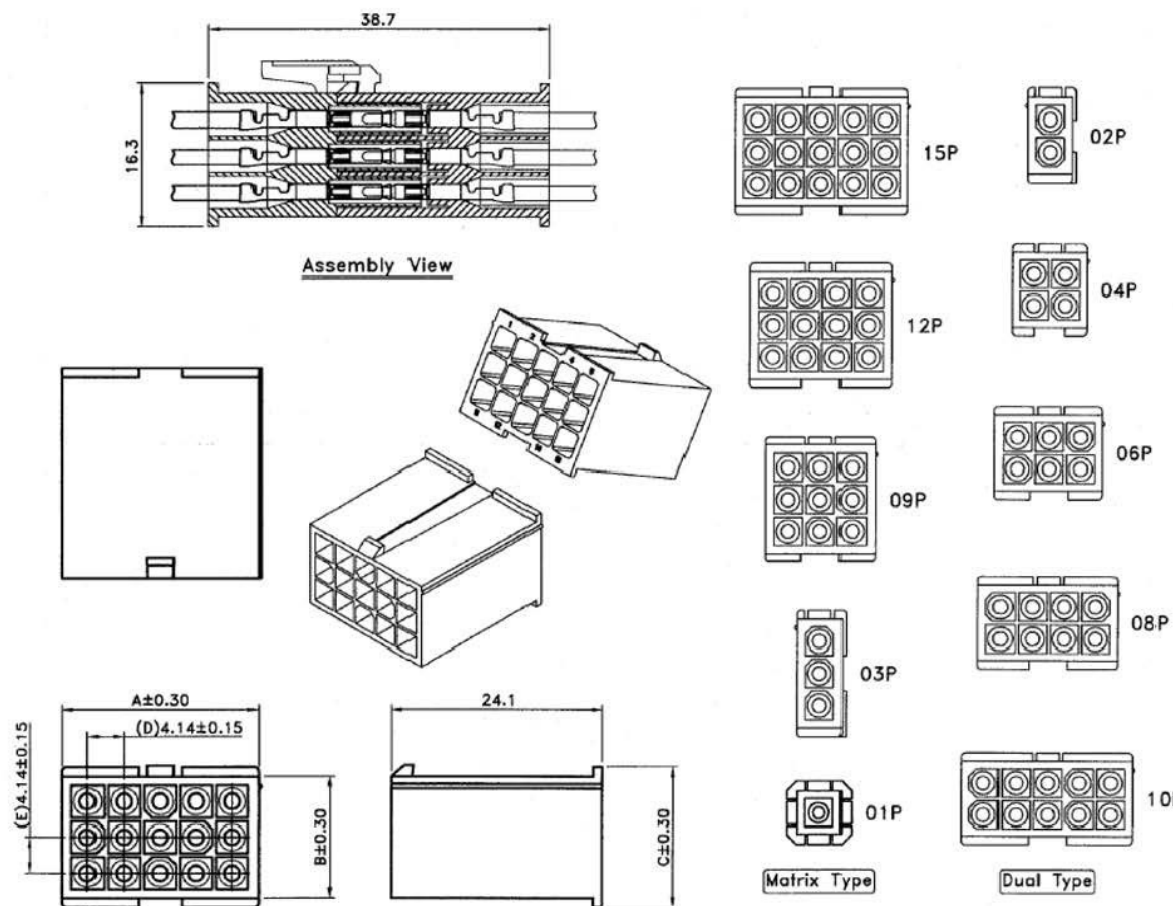

**Material Information:**

Housing material:  
Nylon 66, UL94V-2 rated  
Poles available:  
01-04, 06, 08-10, 12, 15  
All materials compliant with ROHS

**Technical Specifications:**

Current rating:  
3A (15 circuit, UL1007 AWG24) min.  
9A (02 circuit, UL1007 AWG 18) max.  
Withstanding voltage: 1500V AC/minute  
Insulation resistance: 1000MΩ min.  
Contact resistance: 20mΩ max.  
Operating temp range: -25°C to +90°C

**Ordering Information**

HSS - 414 XX



① No. of positions: 01, 02, 03, 04, 06, 08, 09, 10, 12, 15

Dual Type

Poles	Dimensions (mm)		
	A	B	C
02	5.8	9.8	12.3
04	9.8	9.8	12.0
06	14.0	9.8	12.0
08	18.2	9.8	12.0
10	22.3	9.8	12.0

Matrix Type

Poles	Dimensions (mm)		
	A	B	C
01	8.3	-	8.3
03	5.8	14.0	16.3
09	14.3	14.3	16.2
12	18.4	14.0	16.2
15	22.4	14.0	16.2



www.allconnectors.de info@allconnectors.de  
Tel: 0049 7141 500520 Fax: 0049 7141 500534  
Mittelstraße 10, Germany 40880 Mettmann, DE

绘图 (DRAWN)	孙高田	投影 (PROJECT)		公差 (TOLERANCE)	料号 (PART NO)
审核 (CHECKED)	刘思晴	单位 (UNIT)	MM	0.0 ± 0.30	
核准 (APPROVE)		比例 (SCALE)	1:1	0.00 ± 0.20	品名 (NAME)
		版本 (EDITION)	A		
		日期 (DATE)	2013/12/14		

HSS - 414 XX
4.14 线对线连接器 标准