


- SPECIFICATIONS :
- Voltage Rating: 250V AC / DC
 - Current Rating: 7A AC / DC
 - Withstanding Voltage: 1500V AC/minute
 - Temperature Range: -25° C~+85° C
 - Insulation Resistance: 1000MΩ Min.
 - Contact Resistance: 10mΩ Max.
 - Wire Range: AWG#18~22
- *Used in C4255HM series Housing

- Material:
- Terminal: Brass
 - Finish: Tin plated

C4255 T M X - B T1 X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series: C4255
- ② T-Terminal
- ③ Terminal Type: M-mate with female housing
F-Mate with male housing
W-WAFER mate with wafer
- ④ Feature Type: Blank-Normal H-High
- ⑤ 材质/Material: P-Phosphor Bronze, B-Brass
- ⑥ Plating Specification: T1-Tin Plated
- ⑦ Other option: Blank-Stamping before Plating
P-Plating before Stamping

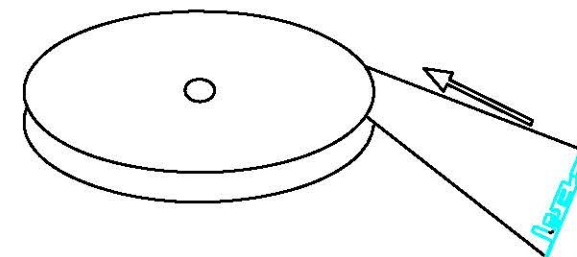

电镀后收料方向

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C4255TM-BT1	AWG#18-#22	3.00mm(max)	Brass	Tin-plated	5,000pcs
C4255TMH-BT1	AWG#16-#22	3.10mm(max)	Brass	Tin-plated	5,000pcs

						<p>一般公差 GENERAL TOLERANCE</p> <p>.X ±0.3 .XX ±0.2 .XXX ±0.1</p>				<p>All Connectors</p> <p>www.allconnectors.de Tel.: 0049 711 7009503 70794 Filderstadt - Germany</p> <p>info@allconnectors.de Fax: 0049 711 7009504 Kettlerstr. 25</p>				<p>料号 PART NO C4255TMX-BT1</p>							
										<p>品名 TITLE 4.20mm Crimp Style connectors</p>											
						核准 APPD		审核 CHK		绘图 DR		日期 DATA		单位 UNIT		比例 SCALE		图号 NUMBER		版次 REV	
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION			审核 CHK	核准 APPD	Rodney	兰雄	Lce	2015/12/01	MM	1/1	38003	A						