


■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M min
- Temperature range: -40°C~+105°C
- Contact resistance: Initial Value/10m max
- After environmental testing/20m max

■ WAFER

- Part No.: MF-9359-2*XX
- Poles: 2-24
- Material: Nylon 66 UL 94V-2 or UL 94V-0
- Q ty: 1000pcs/bag

Poles	Part No	Dimensions (mm)	
		A	B
2	9359-2*01	5.60	--
4	9359-2*02	9.80	4.20
6	9359-2*03	14.00	8.40
8	9359-2*04	18.20	12.60
10	9359-2*05	22.40	16.80
12	9359-2*06	26.60	21.00
14	9359-2*07	30.80	25.20
16	9359-2*08	35.00	29.40
18	9359-2*09	39.20	33.60
20	9359-2*10	43.40	37.80
22	9359-2*11	47.60	42.00
24	9359-2*12	51.80	46.20

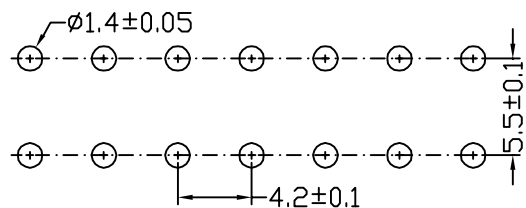

P.C.B. RECOMMENDED LAYOUT

APPROVED BY	DATE	SCALE	TOLERANCE	
	2007/04/11	4:1	.0	± 0.3
CHECKED BY	UNIT	VIEW	.00	± 0.2
	mm	⊕ □	.000	± 0.1
DRAWN BY	VER NO.	SIZE	.0	±
	1	Δ/	.0	±