


■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M min
- Temperature range: -40°C~+105°C
- Contact resistance: Initial Value/10m max
- After environmental testing/20m max

■ WAFER

- Part No.: MF-9360S-2*XX
- Poles: 2-24
- Material: Contact: Brass, Tin plated
Base: Nylon 66 UL 94V-2 or UL 94V-0
- Q`ty: 1000pcs/bag

Poles	Part No	Dimensions (mm)	
		A	B
2	9360S-2*01	5.40	--
4	9360S-2*02	9.60	4.20
6	9360S-2*03	13.80	8.40
8	9360S-2*04	18.00	12.60
10	9360S-2*05	22.20	16.80
12	9360S-2*06	26.40	21.00
14	9360S-2*07	30.60	25.20
16	9360S-2*08	34.80	29.40
18	9360S-2*09	39.00	33.60
20	9360S-2*10	43.20	37.80
22	9360S-2*11	47.40	42.00
24	9360S-2*12	51.60	46.20

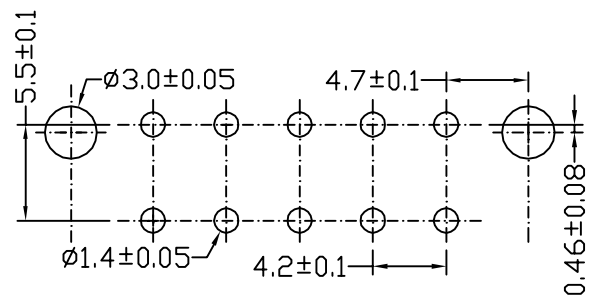

PCB Recommended Layout

APPROVED BY	DATE	SCALE	TOLERANCE	
	2007/03/20	4:1	.0	±0.3
CHECKED BY	UNIT	VIEW	.00	±0.2
	mm	⊕ □	.000	±0.1
DRAWN BY	VER NO.	SIZE	.0	±
	D1	A1	.0	±