

**RECOMMENDED PCB LAYOUT**

- \* Material : Nylon66, UL 94V-2
- \* Current rating : 5A, AC/DC
- \* Voltage rating : 250V AC/DC
- \* Finish : Tin-plated
- \* Operating Temp : -25°C ~ +85°C
- \* Contact resistance : 10mΩ Max.
- \* Insulation resistance : 1000MΩ Min.
- \* Withstanding Voltage : 1500V AC/minute

**All Connectors**

www.allconnectors.de info@allconnectors.de  
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504  
 70794 Filderstadt - Germany Kettenerstr. 25

**RoHS Compliant**


DRAWING BY CY	
CHECKED BY GENIUS	
UNIT/mm	SCALE 1:1
DATE	
SIZE A4	PJECTION

TOLERANCES ARE

X±  
 .X±  
 .XX±  
 .XXX±  
 ANG±



**ORDER INFORMATION**

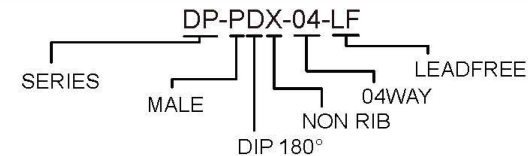

**DESCRIPTION: 5.08mm Wire-to-Board Header DIP 180° Type**