

**Material:**




Housing: See Order Information.  
 Housing Color: See Order Information.  
 Terminal: Copper Alloy  
 Metal Band: Copper Alloy

**Finish:**



Terminal: See Order Information.  
 Metal Band: See Order Information.

**Specification:**

Contact Resistance: 10mΩ Max.  
 Current Rating: 5A AC/DC  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding Voltage: 1500V AC/Minute  
 Operation Temperature: -25° ~ +85°  
 Voltage Rating: 250V AC/Minute  
 Applicable Wire Range: AWE#18-#24  
 Applicable P.C.B Thickness: 0.8mm-1.6mm  
 Applicable P.C.B Hole Dia:  $\phi 1.8\text{mm} \pm 0.05$

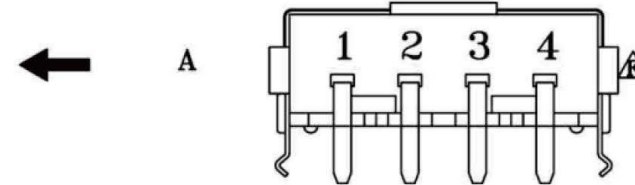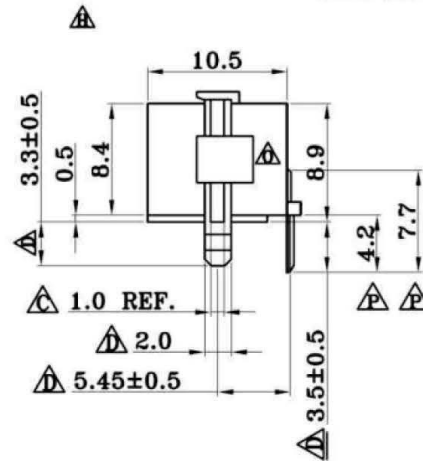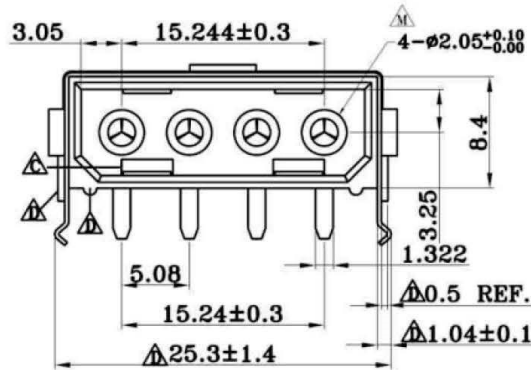

A VIEW

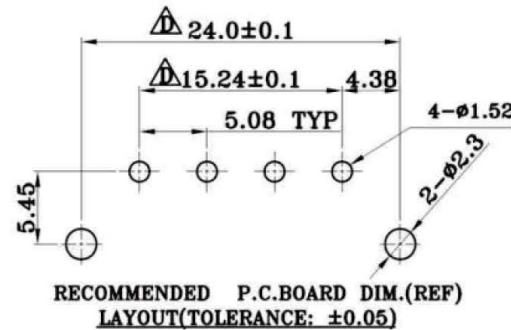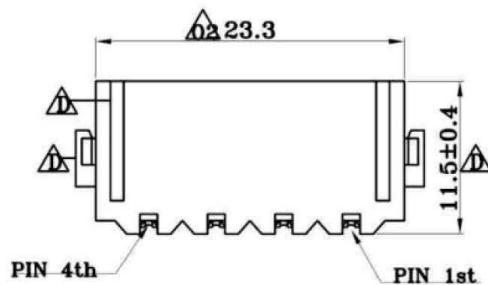

**NOTES:**

- High temp. Process Statement:  
230 degree C for 30 to 60 seconds,  
and 260 degree C for 10 seconds.
- This component and its homogeneous subcomponents are RoHS compliant.
- Dry plastic ball under temperature 150 degree for 6 hours before.
- Keep with water-resist bag and silica gel after assembling .
- Must use 100% new material.

**All Connectors**

www.allconnectors.de info@allconnectors.de  
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504  
 70794 Filderstadt - Germany Kettnerstr. 25

**RoHS Compliant**

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT/mm SCALE 1:1  
 DATE  
 SIZE A4


TOLERANCES ARE

X ±  
 X ±  
 .XX ±  
 .XXX ±  
 ANG ±

PJECTION



**ORDER INFORMATION**

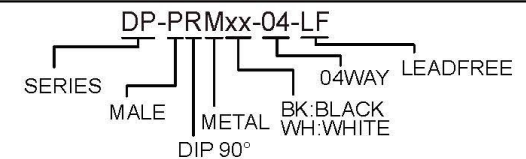

**DESCRIPTION:**