

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C




Insulation Resistance: 1000MΩ/ min.

Dielectric Withstanding Voltage: 1500V AC/ min.

Contact Resistance: 10mΩ/ max.

Material

Material: Nylon66, UL94V-2

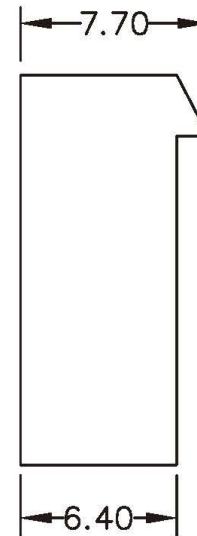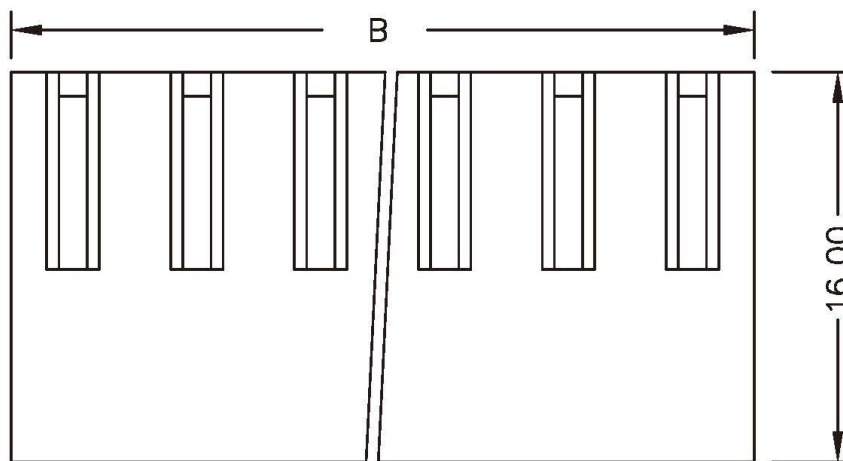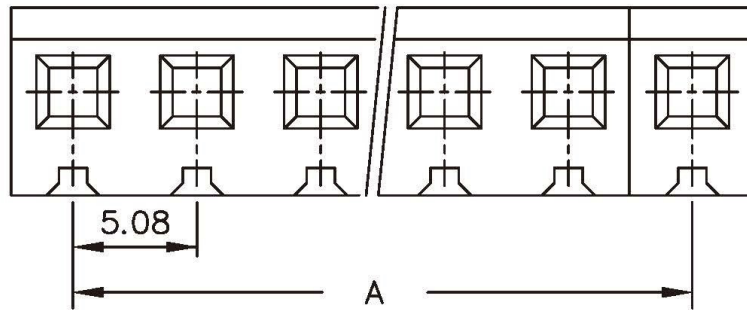

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
2	5.08	10.16	LK-H-02	
3	10.16	15.24	LK-H-03	
4	15.24	20.32	LK-H-04	
5	20.32	25.40	LK-H-05	
6	25.40	30.48	LK-H-06	
7	30.48	35.56	LK-H-07	
8	35.56	40.64	LK-H-08	
9	40.64	45.72	LK-H-09	
10	45.72	50.80	LK-H-10	
11	50.80	55.88	LK-H-11	
12	55.88	60.96	LK-H-12	

RoHS Compliant

All Connectors

www.allconnectors.de

info@allconnectors.de

Tel.: 0049 711 7009503

Fax: 0049 711 7009504

70794 Filderstadt - Germany

Kettnerstr. 25

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1 : 1


DATE

SIZE A4


TOLERANCES ARE

X ±
 .X ± 0.50
 .XX ± 0.10
 .XXX ±
 ANG ±

P PROJECTION



ORDER INFORMATION

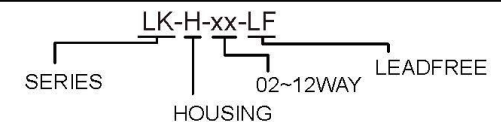

DESCRIPTION: 5.08mm Wire-to-Board Housing