

RECOMMENDED P.C.BOARD HOLE DIM.

Specifications

Electrical

Voltage Rating: 250V(AC)

Current Rating: 7A

Contact Resistance: 20m Ω max.

Dielectric Withstanding Voltage: 1000V AC/1min.

Insulation Resistance: 1000M Ω min.

Material

Circuits: 2~20

Insulator: Nylon 66 UL 94V-2

Color: Natural

Contact: Brass 1.14mm(0.45 ") Square Wire Pins

Plating: Tin or Gold Plated

Temperature Range: -25 °C~+85 °C

Poles	Dimension		Part NO.
	A	B	
2	5.08	10.22	LK-R-02
3	10.16	15.30	LK-R-03
4	15.24	20.38	LK-R-04
5	20.32	25.46	LK-R-05
6	25.40	30.54	LK-R-06
7	30.48	35.62	LK-R-07
8	35.56	40.70	LK-R-08
9	40.64	45.78	LK-R-09
10	45.72	50.86	LK-R-10

All Connectors

www.allconnectors.de

Tel.: 0049 711 7009503

70794 Filderstadt - Germany

info@allconnectors.de

Fax: 0049 711 7009504

Kettenerstr. 25

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X ±


.X ±

.XX ±


.XXX ±

ANG ±

PJECTION



ORDER INFORMATION

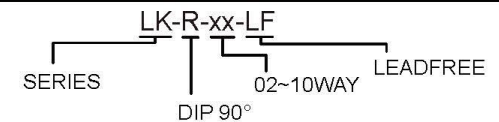

DESCRIPTION: 5.08mm Wire-to-Board Header DIP 90° Type