


### Features:

- 2 ~ 12 circuits available
- UL 94V-2 nylon 66
- Molded pull tab
- With locking ramp
- Molded in locking arm for terminal

### Specifications:

- Current rating: 7A max.
- Voltage rating: 250V AC max.
- Dielectric strength: 1000V AC/minute
- Insulation resistance: 1000MΩ min.
- Temperature range: -40°C ~ 105°C  
(including temperature rise)

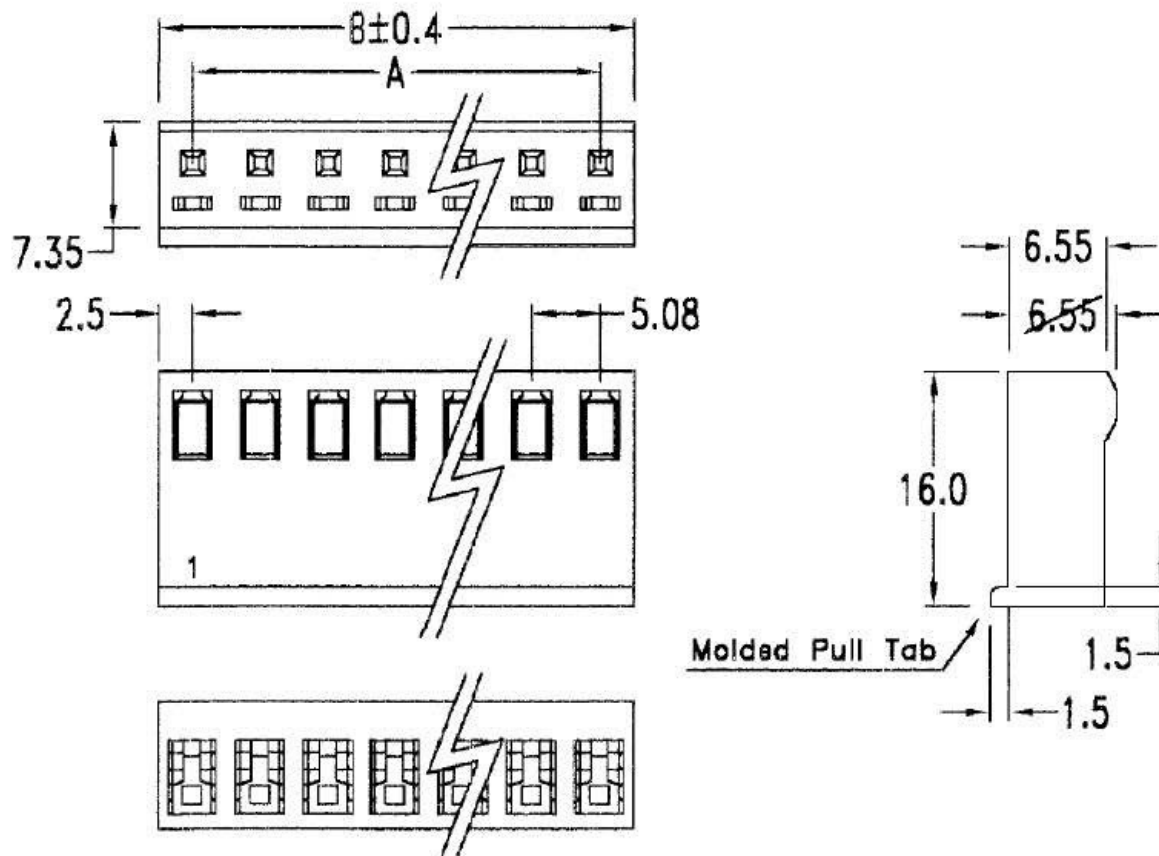

Dimensional Information ( mm )

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	5.08	10.33	6	25.40	30.65	10	45.72	50.97
3	10.16	15.41	7	30.48	35.73	11	50.80	56.05
4	15.24	20.49	8	35.56	40.81	12	55.88	61.13
5	20.32	25.57	9	40.64	45.89			

**Allconnectors**

www.allconnectors.de  
Tel: +49 211 2007501  
41248 Kildesheim, Germany

info@allconnectors.de  
Fax: +49 211 2007502  
Kildesheim, DE

PART NO. LKS-H-xx

DWG NO. LKS-H-xx

FILE NO.

UNIT / mm SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X ± 0.2  
XX ±  
XXX ±  
AWG

DESCRIPTION:

AREA REVISIONS HK DATE

煜倫股份有限公司