

### SPECIFICATIONS


Voltage rating:300V AC,DC

Current rating:12A AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000M OHM min

Temperature range:-25°C~+90°C

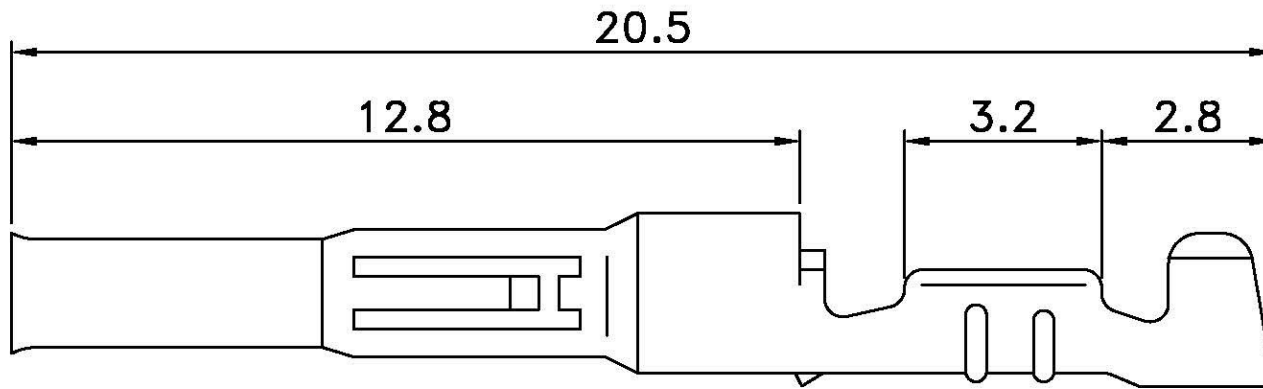

L-F-xx-LF  
LEADFREE

RoHS Compliant

Part NO	WIRE RANGE	O.D.OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
	AWG				
L-F-14	20-14	1.9-3.4	PHOSPHOR	TIN-PLATED	3500
			GOLD-FLASH	BRONZE	
L-F-20	24-20	1.5-2.7	PHOSPHOR	TIN-PLATED	5000
			GOLD-FLASH	TIN-PLATED	

All Connectors

www.allconnectors.de  
tel.: 0049 711 7009-003  
0/194 Hilderstätt - Germany

info@allconnectors.de  
fax: 0049 711 7009-01  
Kettnerstr. 25

PART NO. L-F-xx

DWG NO. L-F-xx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2  
XX ±  
XXX ±  
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

焯倫股份有限公司