

**SPECIFICATIONS**


Voltage rating:300V AC,DC

Current rating:12A AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000M OHM min

Temperature range:-25°C~+90°C

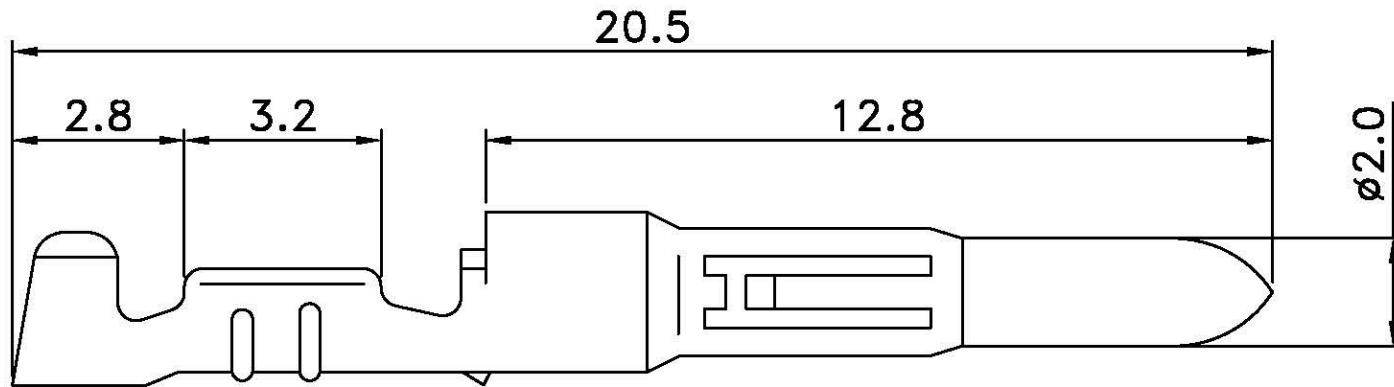

L-M-xx-LF  
LEADFREE

**RoHS Compliant**

Part NO	WIRE RANGE	O.D.OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
	AWG				
L-M-14	20-14	1.9-3.4	PHOSPHOR	TIN-PLATED	3500
			GOLD-FLASH	BRONZE	
L-M-20	24-20	1.5-2.7	PHOSPHOR	TIN-PLATED	5000
			GOLD-FLASH	TIN-PLATED	

**Allconnectors**

www.allconnectors.de info@allconnectors.de  
Tel: 0049 711 7095003 Fax: 0049 711 7095001  
70754 Filzschlucht Germany Kettelerstr. 25

PART NO. L-M-xx

DWG NO. L-M-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2  
XX ±  
XXX ±  
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

**焜倫股份有限公司**