
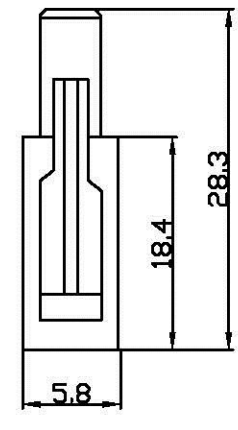
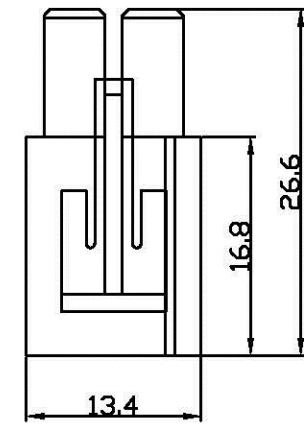
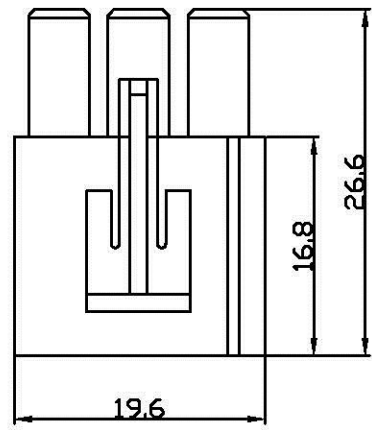
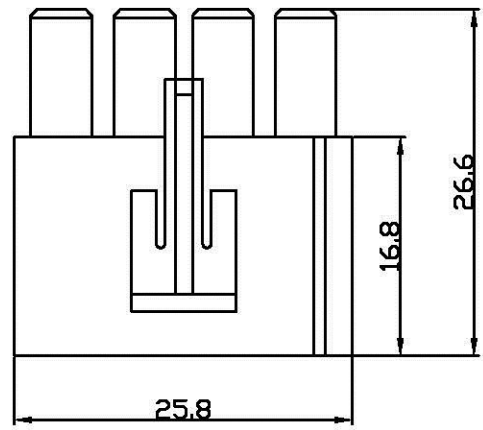





L-S-1Xxx-LF
LEADFREE
RoHS Compliant

SPECIFICATIONS
 Circuit: 1,2,3,4,6,9,12,15
 Voltage rating: 300V AC,DC
 Current rating: 12A AC,DC
 Withstanding voltage: 1500V AC/minute
 Insulation resistance: 1000M OHM min
 Temperature range: -25 C~+90 C
 Material: UL94V-2 nylon 66

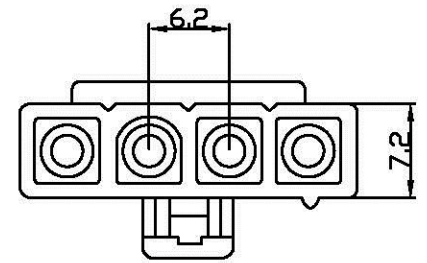

L-S-1X04

L-S-1X03

L-S-1X02

L-S-1X01

Allconnectors
 www.allconnectors.de
 Tel.: 0649 711 7009503
 70741 Ulmstadt - Germany
 info@allconnectors.de
 Fax: 0649 711 7009504
 Kettnerstr. 25

焜倫股份有限公司

PART NO. L-S-1Xxx		CHECKED BY CY		TOLERANCES ARE .X±0.2 .XX± XXX± AWG	DESCRIPTION:			
DWG NO. L-S-1Xxx		DRAWING BY						
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE	
UNIT / mm	SCALE 1:1							