

Features / Specifications:

- Current rating: 11A
- Voltage rating: 600V
- Ambient temperature range: -55°C ~ 105°C

Ordering & Dimensional Information (mm)

Part No.	Dimension				Wire range	Material	Thickness	Finish
	a	b	c	d				
UL-MSP-18	2.4	2.4	3.4	3.4	#18 ~ #22	Brass	0.3mm	Tin-plated
UL-MSP-16	3.5	3.2	4.0±0.4	4.5±0.4	#16 ~ #20			
UL-MSP-12	3.5	3.2	5.5±0.4	5.9±0.4	#12 ~ #14			
UL-MSPG-18	2.4	2.4	3.4	3.4	#18 ~ #22			Contact area: Gold-flash Other: Tin-plated
UL-MSPG-16	3.5	3.2	4.0±0.4	4.5±0.4	#16 ~ #20			
UL-MSPG-12	3.5	3.2	5.5±0.4	5.9±0.4	#12 ~ #14			

All Connectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25

RoHS Compliant


DRAWING BY CY
CHECKED BY GENIUS
UNIT/mm SCALE 1:1
DATE
SIZE A4

TOLERANCES ARE

X.±
.X±
.XX±
.XXX±
ANG±



ORDER INFORMATION

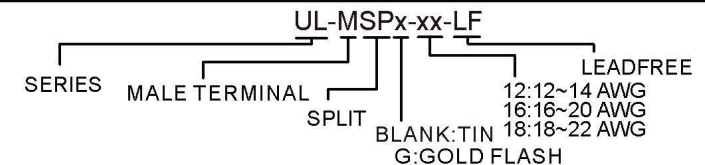

DESCRIPTION: