


SPECIFICATIONS
 Voltage rating: 300V AC,DC
 Current rating: 12A AC,DC
 Withstanding voltage: 1500V AC/minute
 Insulation resistance: 1000M Ω min
 Temperature range: -25°C~+90°C
 Material: UL94V-2 nylon 66

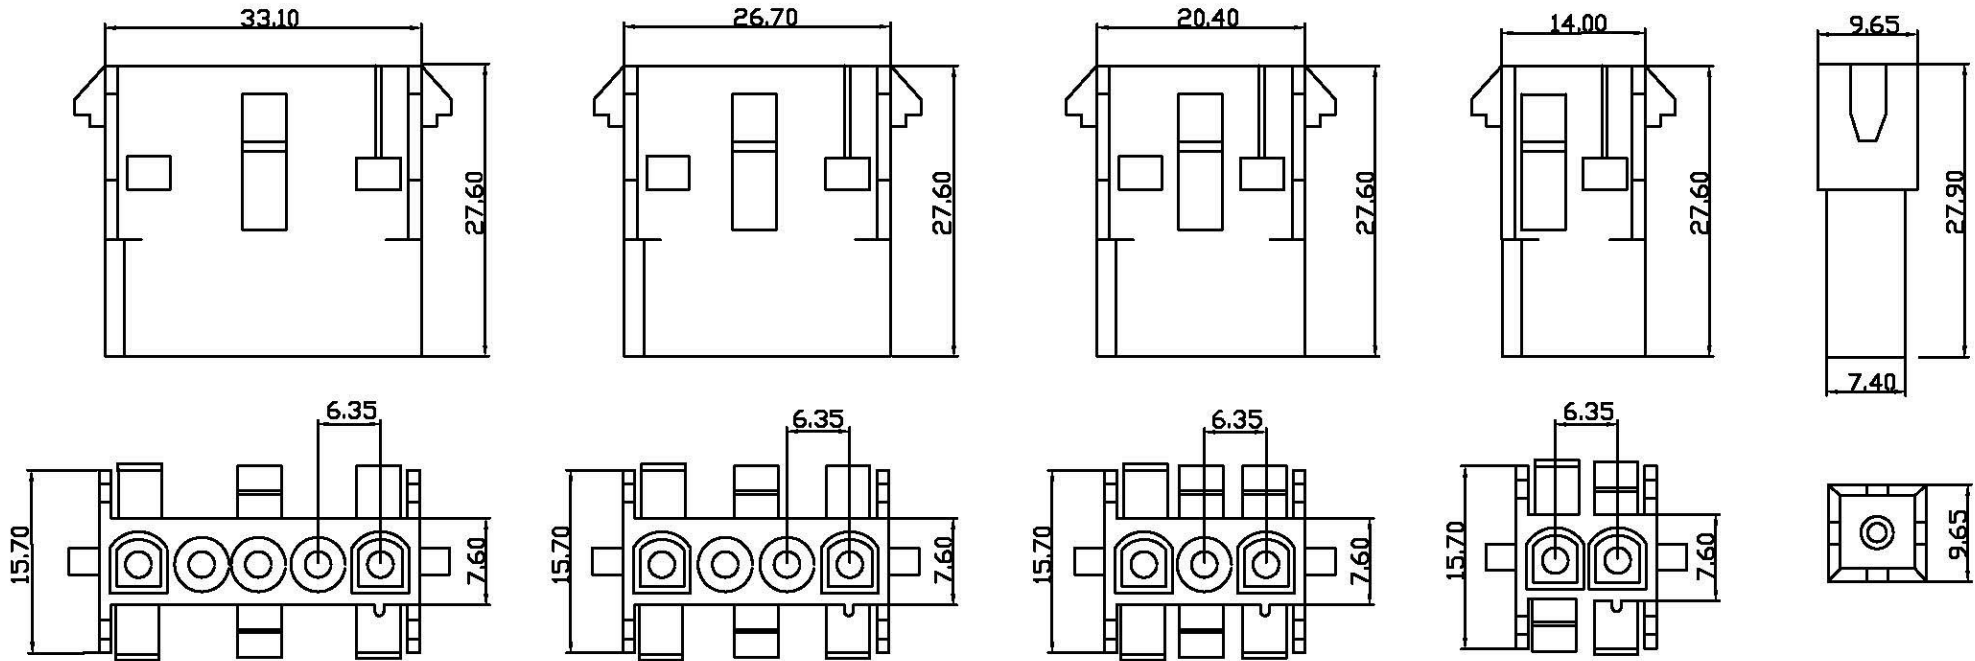

UL-P-1Xxx-LF
 LEADFREE

RoHS Compliant

Allconnectors

www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7909503 Fax: 0049 711 7909504
 41/69 Hilgertstr. 6 Germany Krefeld, Germany

PART NO. UL-P-1Xxx

DWG NO. UL-P-1Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

AREA REVISIONS HK DATE

焜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION