


0.25 (Cut off Tab)

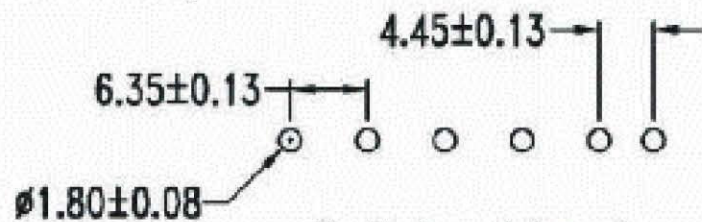

P. C. board layout

**Features:**

- Material: UL 94V-2 Nylon 66
- Pin Material: Tin-plated phosphor bronze
- Standard Color: Nature

**Specification:**

- Current rating: 13A (2~4P), 11A (6~15P)
- Voltage rating: 600V
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature rise: -55°C ~ 105°C
- Operating Temperature Range: -25°C ~ 85°C

UL-PDX-1Xxx-LF  
LEADFREE

RoHS Compliant

**Dimensional Information ( mm )**

| Circuits | Dim. A | Dim. B | Circuits | Dim. A | Dim. B |
|----------|--------|--------|----------|--------|--------|
| 2        | 6.35   | 13.97  | 7        | 38.10  | 45.72  |
| 3        | 12.70  | 20.32  | 8        | 44.45  | 52.07  |
| 4        | 19.05  | 26.67  | 9        | 50.80  | 58.42  |
| 5        | 25.40  | 33.02  | 10       | 57.15  | 64.77  |
| 6        | 31.75  | 39.37  |          |        |        |

**Allconnectors**

www.allconnectors.de  
Tel.: 0049 711 2009508  
70704 Filderstadt - Germany

info@allconnectors.de  
Fax: 0049 711 2009504  
Kettelerstr. 25

PART NO. UL-PDX-1Xxx

DWG NO. UL-PDX-1Xxx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE