


Features:

- 2 ~ 10 circuits available
- Pin Material: Tin-plated phosphor bronze

Specification:

- Current rating: 13A (2~4P), 11A (6~10P)
- Voltage rating: 600V
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature rise: -55°C ~ 105°C

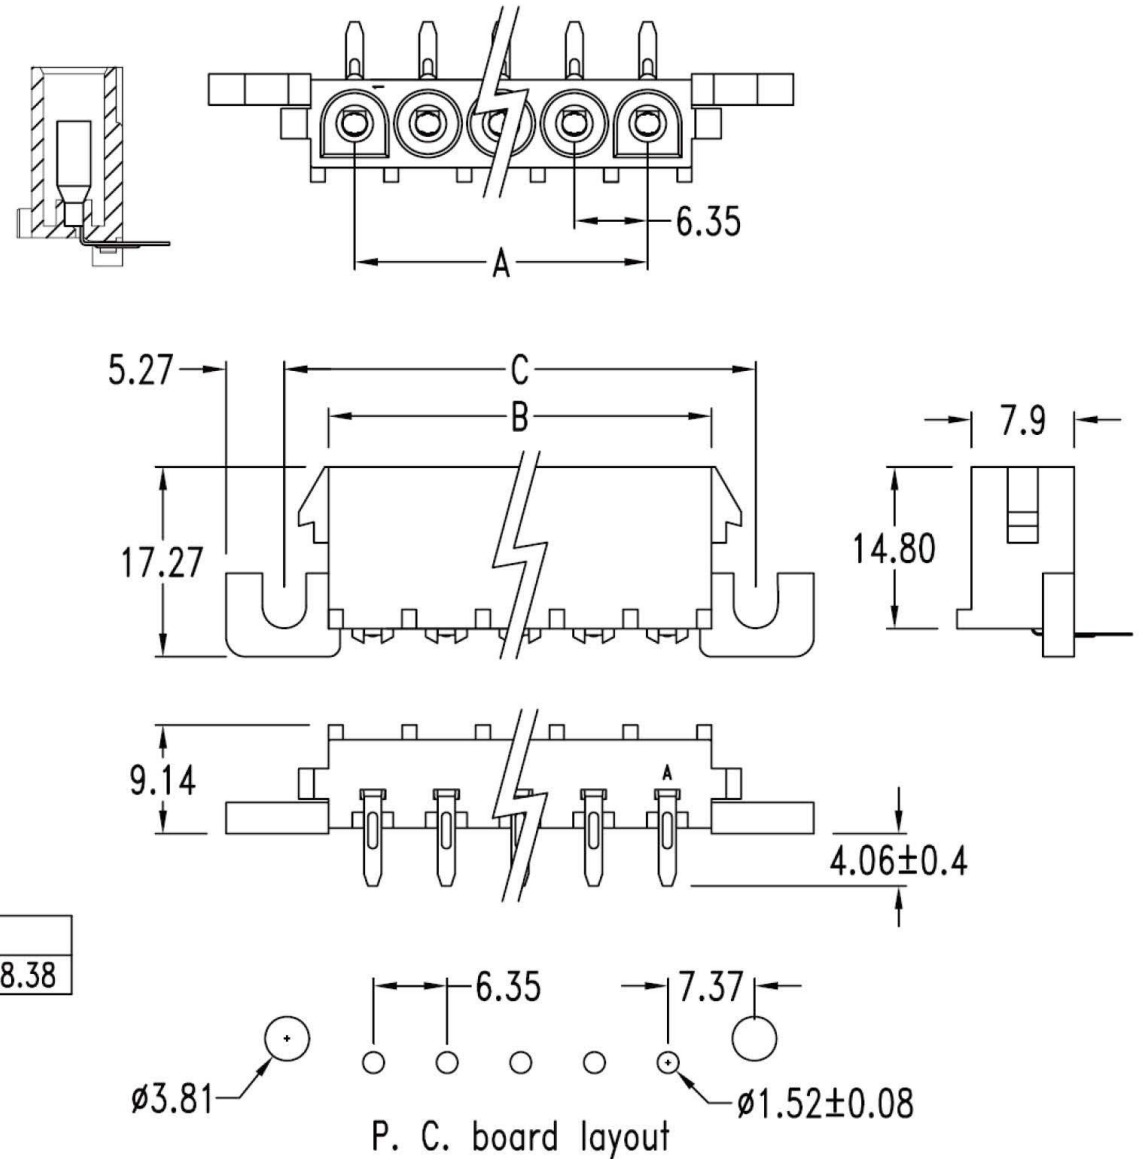

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C
N	6.35 x (N - 1)	6.35 x N + 1.27	6.35 x N + 8.38

&& N = 2 ~ 10

All Connectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25


RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT/ mm SCALE 1 : 1
DATE
SIZE A4

TOLERANCES ARE

X ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

UL-SRE-1Xxx-LF
SERIES | 1X02:02WAY | LEADFREE
| 1X10:10WAY |
| EAR |
| DIP 90° |
| FEMALE |

DESCRIPTION: