

PWL-PE-1Xxx-LF
LEADFREE

RoHS Compliant

SPECIFICATIONS

Voltage rating:300V AC,DC









Current rating:12A,AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000M Ω HM min

Temperature range:-25°C~+85°C

Material:UL94V-2 nylon 66

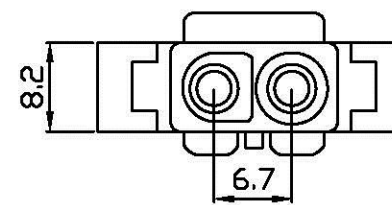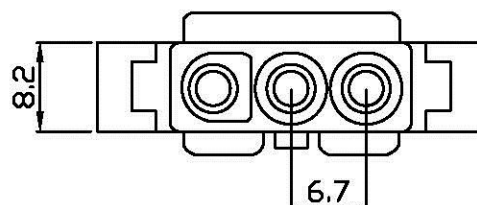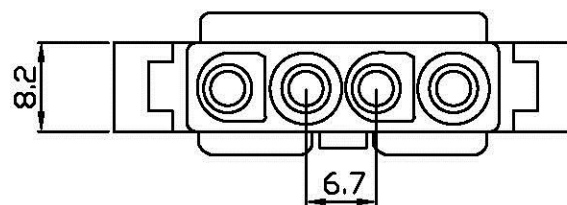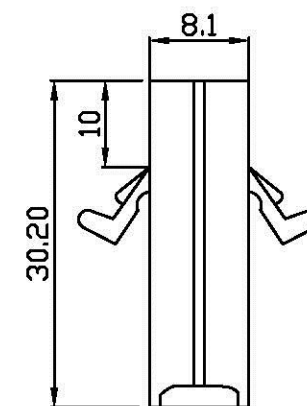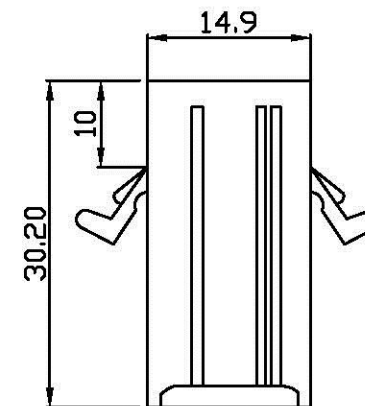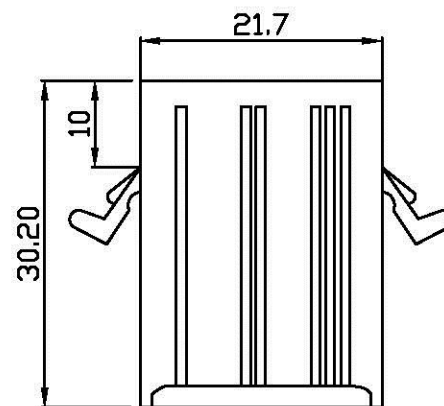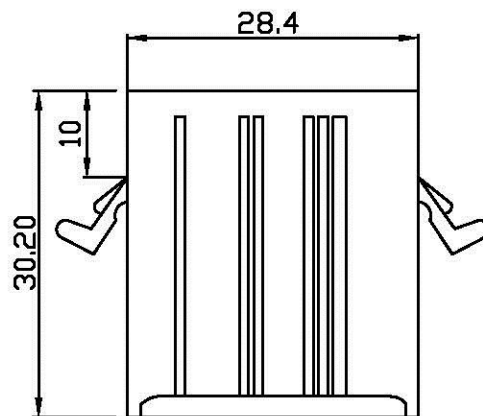

PWL-PE-1X04

PWL-PE-1X03

PWL-PE-1X02

PWL-PE-1X01

Allconnectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filberstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25

PART NO. PWL-PE-1Xxx

DWG NO. PWL-PE-1Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE